



**POWER SOLUTIONS
INTERNATIONAL**

SAVANTECH
The Source of Energy Generators

An Engineering and Technology Company

MOTEURS Baudouin
AUTHORIZED PSI DISTRIBUTOR

40LT NATURAL GAS/PROPANE ENGINE

The PSI 40-liter is a U.S. EPA-certified natural gas and propane engine developed from the block up to be a reliable and durable power unit. Built upon a proven marine-diesel grade block, the 12-cylinder V-Configuration, turbocharged and after-cooled engine features replaceable wet liners and water-cooled exhaust.

Superior engine performance is driven by an ECU that integrates and coordinates all critical functions including: Governor, Variable Ignition Timing, Air Fuel Ratio Control, Knock Suppression and Engine Protection.

The PSI Energy product lineup has displacements from 0.97L to 65L. These engines are an extension of the PSI product line, which is based upon blocks from 650cc to 8.8L. All PSI engines feature the same fuel systems and controls, simplifying your application development and support.

GENERAL DATA


- Turbo-charged and after cooled, cast iron with wet cylinder liners v-block
- Cast iron cylinder block with inspection door per cylinder
- Modular 4 valve cast iron cylinder heads
- Weichai supplied engine block
- High strength alloy steel forged crankshaft
- Thermostatically-controlled cooling system with engine integrated oil cooler
- Gear driven dual water pump and engine mounted fan
- J1939 CANBUS interface
- 3-Way Catalyst
- High efficiency air filter
- SAE #0 flywheel housing, SAE #18 flywheel
- Proven US ECU, fuel system and engine control

POWER RATINGS

GAS ENGINE	NG							RPM
	Gross Engine Output			Typical Generator output				
	ESP	PRP	COP	ESP	ESP	PRP	PRP	
	kWm	kWm	kWm	kWe	kVA	kWe	kVA	
40LT	740	666	466	681	851	611	764	1500
	920	828	580	836	1045	749	936	1800

GAS ENGINE	LPG							RPM
	Gross Engine Output			Typical Generator output				
	ESP	PRP	COP	ESP	ESP	PRP	PRP	
	kWm	kWm	kWm	kWe	kVA	kWe	kVA	
40LT	487	438	307	441	551	394	493	1500
	584	526	368	517	646	462	577	1800

kWe values are based on standard assumptions for mechanical and electrical losses.
Ratings and performance is subject to site conditions and PSI application and ratings guidelines.

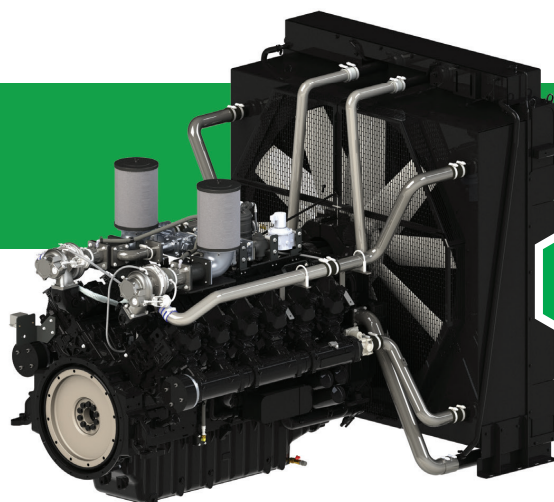

PSI ENERGY

FEATURES

- U.S. EPA-Certified
- Oil cooled light alloy pistons with high performance piston rings
- Hardened valves and valve seats
- Valley mounted water cooled exhaust manifold
- Telematics compatibility
- Full flow oil filter

PSI 40LT ENGINE DATA

Model Number	40LT
Cylinders	90°, V-12
Induction System	Turbocharged & air-to-air charge-cooled
Combustion System	Spark-ignited
Cooling System	Water-cooled
Displacement	40L
Compression Ratio	10.5:1
Bore & Stroke	150 mm x 185 mm
Fuel Type	Natural Gas / Propane
Direction of Rotation	Counter-clockwise viewed on flywheel
Dry Weight	3,390 kg

