

TECHNICAL DATA SHEET



ALTERNATOR SLS18 MC

Single-Phase brushless synchronous alternator with AVR - 4 poles

SLS18 MC

COMMON DATA

Rated Power at 50Hz	kVA	10
Rated Power at 60Hz	kVA	12
Rated Power Factor		0,8
Nominal Temperature	°C	40
Control System		self-excited
Execution		brushless
Regulation Type		AVR
Insulation Class		H
Protection		IP23
Maximum Over speed	rpm	2250
Overload		110% of rated power for one hour in a cycle of 6 hours
Air Flow Requirement	m ³ /min	5,5 at 50Hz 5,7 at 60Hz
R.F.I. Suppression		Standard EN55011

REGULATION DATA

AVR	HVR11
Sensing	single-phase
Voltage Regulation	±1%
Sustained Short Circuit	> 250% of rated current

WINDING DATA

Stator Winding	Single layer with auxiliary winding
Rotor Winding	with damping cage
Number of Leads of Stator	4
Stator Winding Resistance	Ω 0,195 at 20°C
Rotor Winding Resistance	Ω 2,22 at 20°C
Exciter Stator Resistance	Ω 15 at 20°C
Exciter Rotor Resistance	Ω 0,72 at 20°C
THD at full load	<5%
THD at no load	<3%
Excitation at no load	Adc 0,86
Excitation at full load	Adc 2

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

ON REQUEST

UL 1446, Systems of Insulating Materials - General CSA-C22.2 No. 0, Appendix B, General Requirements - Canadian Electrical Code, Part I

CAN/CSA - C22.2 No. 100-14 (R2009) Motors and Generators, UL1004-1 2nd ed. Rotating Electrical Machines - General Requirements, UL1004-4 2nd ed. Electric Generators

SLS18 MC

ELECTRICAL DATA

Frequency		50Hz - 1500rpm			60Hz - 1800rpm		
Voltage Series Star	V	220	230	240	220	230	240
Rated Power in Class H (125°C/40°C)	kVA	10	10	10	12	12	12
	kW	8	8	8	9,6	9,6	9,6
Rated Power in Class F (105°C/40°C)	kVA	9	9	8,5	11	11	10,5
	kW	7,2	7,2	6,8	8,8	8,8	8,4
Rated Power Standby (150°C/40°C)	kVA	10,8	10,8	10,4	13	13	12,3
	kW	8,64	8,64	8,32	10,4	10,4	9,84
Rated Power Standby (163°C/27°C)	kVA	11,2	11,2	10,8	13,4	13,4	13
	kW	8,96	8,96	8,64	10,72	10,72	10,4

EFFICIENCY IN CL. H (PF=1)

4/4		83,6%			84,1%	
3/4		84,0%			84,6%	
2/4		81,4%			82,0%	
1/4		80,2%			80,8%	

REACTANCES AND TIME CONSTANTS

pcc		0,67			0,67	
X _d - dir. axis synchronous		231%	211%	194%	231%	211%
X' _d - dir. axis transient		17,5%	16,0%	14,7%	17,5%	16,0%
X'' _d - dir. axis subtransient		8,1%	7,4%	6,8%	8,1%	7,4%
X _q - quad. axis reactance		129%	118%	108%	129%	118%
T' _{do} - O.C. field time constant		99ms				
T' _d - Transient time constant		6ms				
T'' _d - Sub-transient time constant		5ms				

MECHANICAL DATA


Bearing non drive end	6306-2RS-C3					
Bearing drive end (B3/B14 form)	\					
Weight of generator	in B2	kg	112			
	in B3/B14	kg	\			
	in B3/B9	kg	\			

SLS18 MC


MOMENT OF INERZIA

B3/B9	kg·m ²	\
SAE 7½	kg·m ²	0,192
SAE 8	kg·m ²	0,201
SAE 10	kg·m ²	0,218
SAE 11½	kg·m ²	0,237
SAE 14	kg·m ²	\
SAE 18	kg·m ²	\
B3/B14	kg·m ²	\

DERATING CURVES

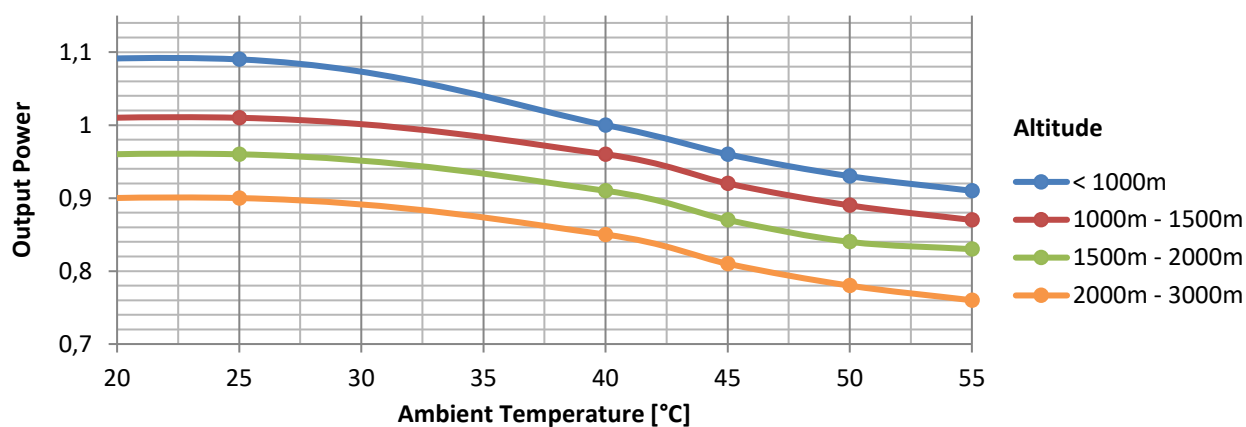


WIRING DIAGRAM

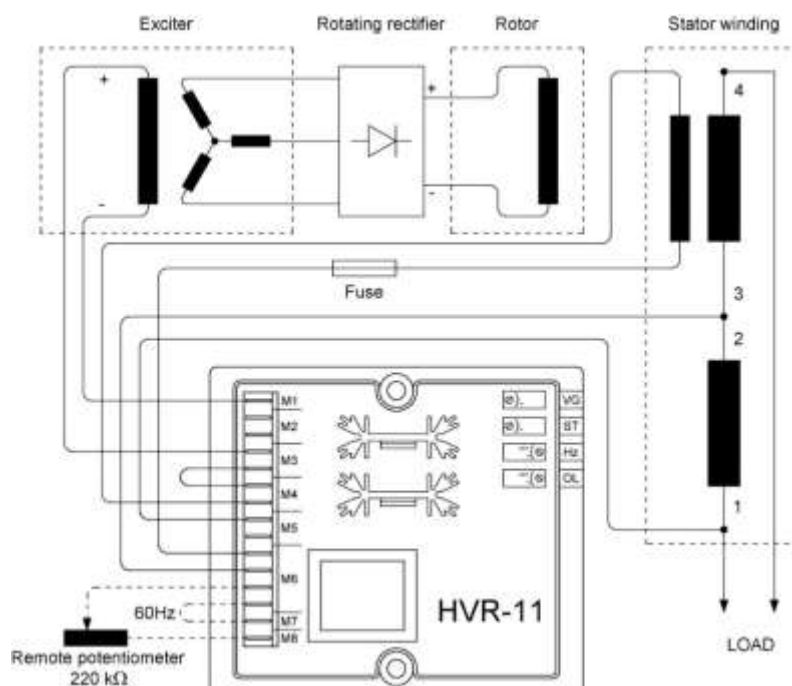

SLS18 MC


TRANSIENT VOLTAGE VARIATION 50Hz

Transient Voltage Variation @ 50Hz

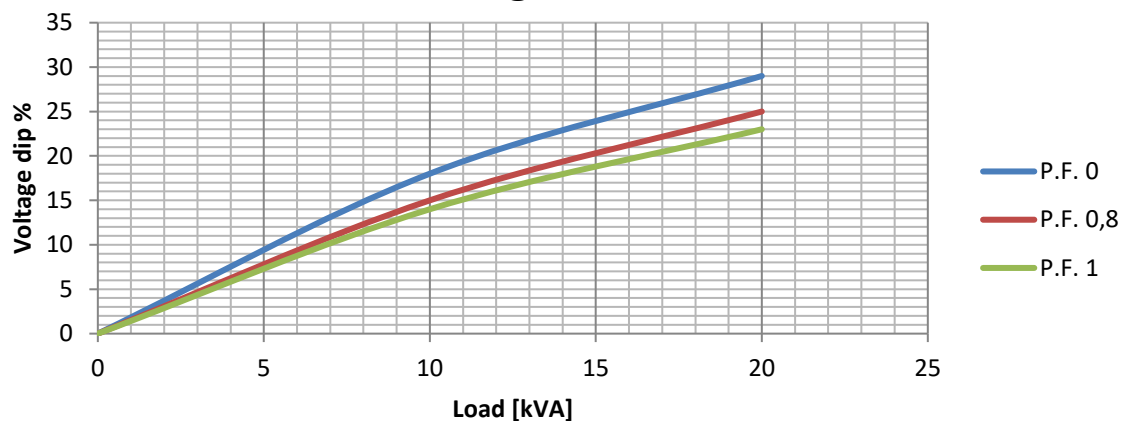

TRANSIENT VOLTAGE VARIATION 60Hz


Transient Voltage Variation @ 60Hz

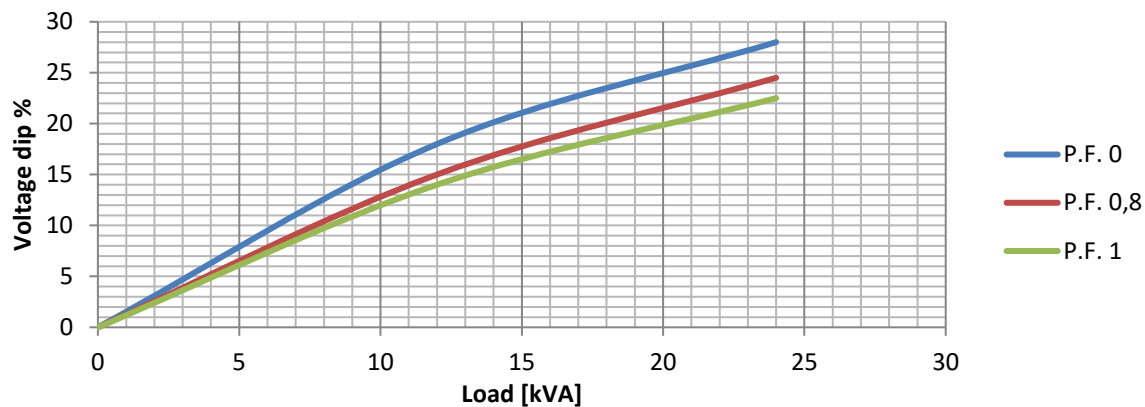

SLS18 MC


EFFICIENCY 50Hz

Efficiency Curves @ 50Hz

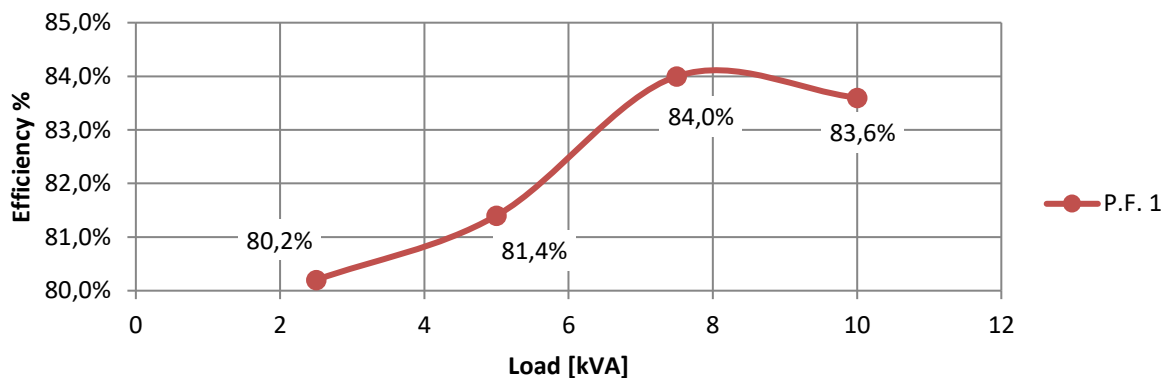


EFFICIENCY 60Hz

Efficiency Curves @ 60Hz

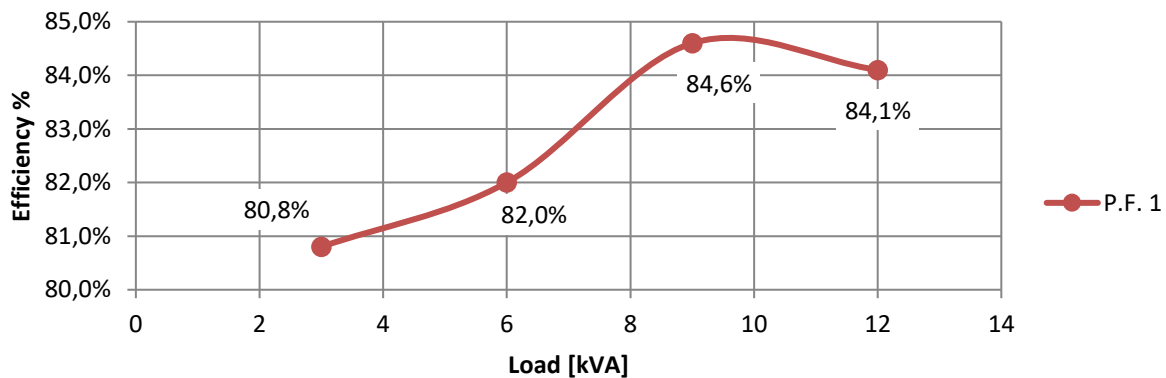

SLS18 MC

FORMA - FORM SAE

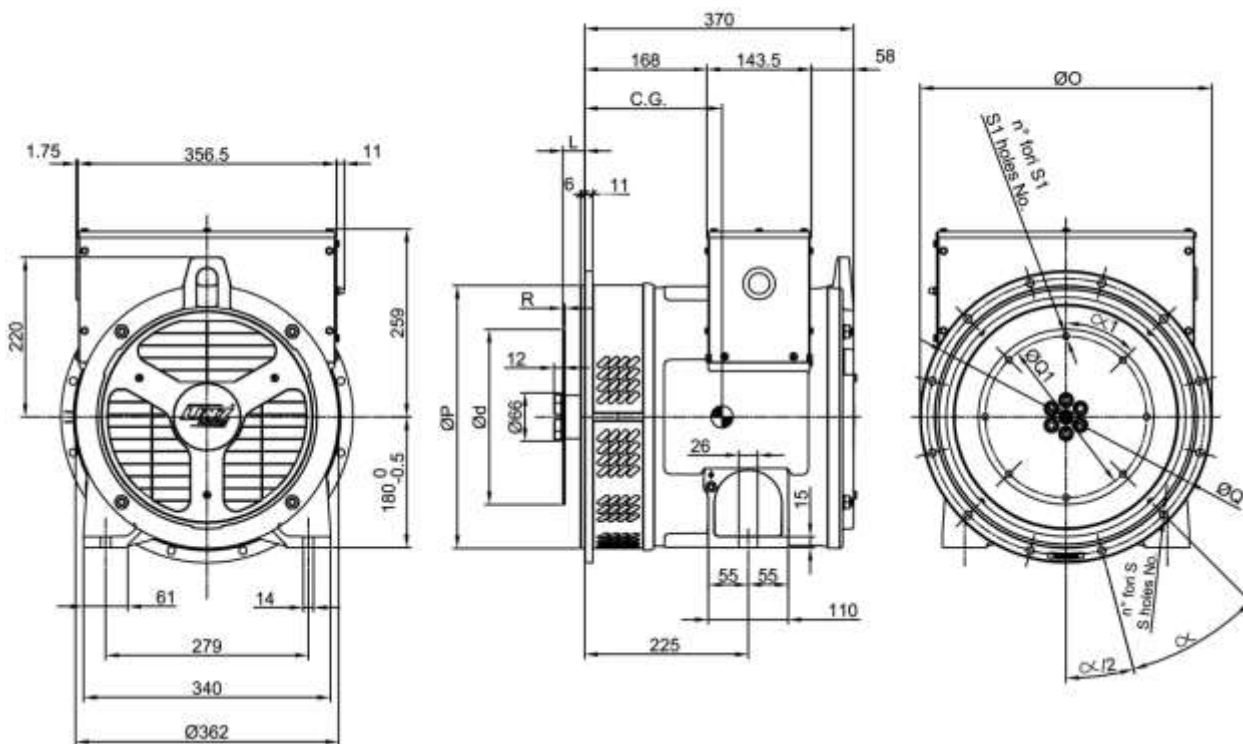

TIPO - TYPE	C.G.
SLS/SLT18 MC MD35	190
SLS/SLT18 MD MD35	192

SAE N.	FLANGIE - FLANGES - BRIDAS					
	Ø O	Ø P	Ø Q	n. fori holes No.	S	α
5	356	314.3	333.4	8	11	45°
4	402	362	381	12		30°
3	451	409.6	428.6	12		30°

SAE N.	GIUNTI A DISCO - COUPLING DISCS - JUNTAS A DISCOS						
	L	Ø d	Ø Q1	n. fori holes No.	S1	α1	R
6 1/2	30.2	215.9	200	6	9	60°	3
7 1/2	30.2	241.3	222.25	8	9	45°	
8	62	263.52	244.47	6	10.5	60	4.5
10	53.8	314.32	295.27	8	10.5	45°	
11 1/2	39.6	352.42	333.37	8	10.5	45°	