



Totally Focused. Totally Independent.

Technical Guide

ECP32 4 C



The world's largest
independent producer of
alternators 1 – 5,000kVA

General Data

Standards

Alternators are designed and produced within an ISO 9001 environment. The entire series is manufactured according to, and complies with, the most common specifications such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, NF 51.111, NEMA MG 1-2011, ISO 8528-3. They also comply with other specific standards such as UL1446, UL 1004/4 and /B and CAN/CSA-C22.2 No14-95-No100-95.

Windings and Performances

All windings are 2/3rds pitch to eliminate triplen harmonics within the voltage waveform and to avoid excessive neutral currents in certain parallel operating conditions. A fully interconnected aluminium or copper damper cage is supplied on the rotor of all models (excluding the ECP3 series).

- ▶ 12 wire reconnectable:
50Hz – 380V to 440V and 220/110V to 240/120V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220/110V to 240/120V (de-rates may apply at certain voltages)
- ▶ 6 wire reconnectable:
50Hz – 380V to 440V and 220V to 240V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220V to 240V (de-rates may apply at certain voltages)


Winding Configurations	Standard		Special (dedicated)			
	12 wire Reconnectable	6 wire Reconnectable	380V and 600V 60Hz	690V 50/60Hz	220-240V 1ph 50Hz	220-240V 1ph 60Hz
ECP3 to ECO38	Std	Option	Option	Option	Option	Option
ECO40	Std	Option	Option	Option	Option (to ECO40)	Option (to ECO40)
Insulation materials	Class H	Class H	Class H	Class H	Class H	Class H
High efficiency	Std	Std	Std	Std	Std	Std
High motor starting	>300%	>300%	>300%	>300%	>300%	>300%
THD (Total Harmonic Distortion)	Typically <3.5% full load L-L	Typically <3.0% full load L-L	Typically <3.5% full load L-L	Typically <3.5% full load L-L	Typically <4.5% full load L-N	Typically <4.5% full load L-N
Interference suppression	VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request					

Winding Protection

There are various degrees of protection for the windings following the standard impregnation process, as can be seen here. The TOTAL+ epoxy black coating is recommended for arduous applications.

Winding Protection:	STANDARD	STANDARD+	GREY	GREY+	TOTAL+
ECP3	Std	Option	Option	Option	Option
ECP28 and ECP32	-	Std	Option	Option	Option
NPE32, ECP34 to ECO40	-	-	Std	Option	Option

General Data

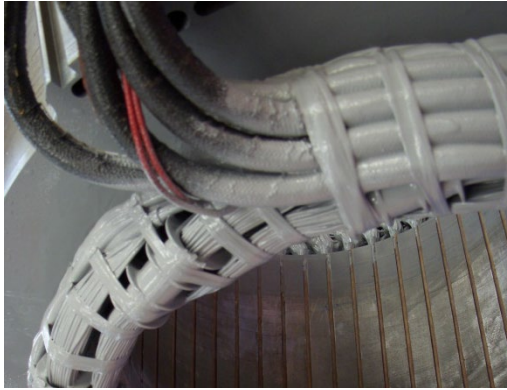


Grey treatment (marinization) on the left, TOTAL+ treatment shown on the right. The EG43 grey varnish, is a high temperature insulating enamel that forms a tough and flexible film, with excellent moisture and chemical protection. It is water and oil proof, and also protects windings from abrasion. It is applied spraying an over coating layer over the impregnated winding, or dipping the stator in a varnish barrel for superior treatments

The TOTAL+ is a protection system that makes Mecc Alte special. It is the ultimate winding treatment that offers truly superior performances when the environment is really harsh, or the application very demanding. The TOTAL+ is also extremely resistant to the particle abrasion as it adsorbs the impacts.

Protection for Environment

In addition to protection on the windings themselves, the alternators can have increased degree of protection. Standard level is IP23 but the following solutions are also available: IP23 DP with inlet filters, IP23 with only terminal box in IP45, IP43 and IP45. Derates may be applied.

Info: https://www.meccalte.com/downloads/MA0605_Bulletin_IP.pdf




Construction

The robust mechanical structure withstands up to 5G in any direction and 9G vertically and its design permits easy access to the connections and components during routine maintenance check-ups. The mechanical design has used the most advanced FEM techniques. The materials used are: FEP12 steel for the frame, C45 steel for the shaft and cast iron or aluminum pressure die cast for the end-brackets: fans are aluminum die casted either nylon fiber glass loaded, UL compliant materials. Rotors are dynamically balanced according grades 6.3 (up to series 32) or 2.5 (from series 34 onwards) of ISO 1940-1.

Terminals and Terminal Box

Easy access to regulators is possible due to a new AVR panel. Terminal boards have been redesigned into a special L configuration, specifically to ease customer connections; with this kind of terminal board it is possible to place a second terminal board in order to get 12 available terminals. Current transformers are available as an option on series ECO38 with single or dual output.

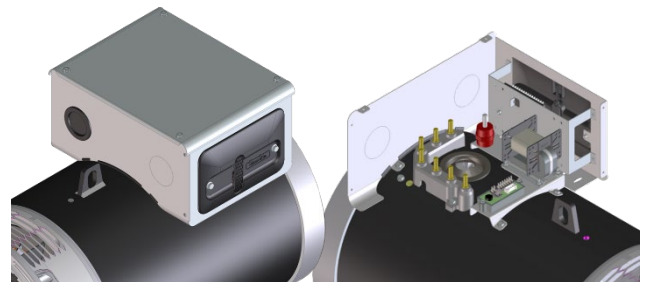

Excitation and Regulation Systems

All ECP/ECO series have MAUX auxiliary winding to power the digital regulator. Both DSR and the DER1 are available to connect to PC through the DxR2 USB interface and DxR TERMINAL software to interrogate/download alarms & settings for analysis or for cloning other regulators. DER2 has got an integrated USB connection and can be connected to the PC without any optional connection boards. More settings such as LAMS, digital RAM based synchronous external control and soft start are obtainable through the DxR connection. Simple analogue potentiometers are available for the more usual adjustments.

Excitation Systems	DSR	DER1	DER2
ECP3 to ECO38	Std	Option	Option
ECO40	-	Std	Option
Parallel Operation	✓	✓	✓
Mains Parallel	✓	✓	✓
3 Phase Sensing (rms)	-	✓	✓
Accuracy	+/-1%	+/-0.5%	+/-0.5%
Remote Voltage Control	✓	✓	✓
Alarm Log	✓	✓	✓
Analogue and Digital Configurable	✓	✓	✓
LAMS (Load Acceptance V/f)	✓	✓	✓
APD (Active Protection Output)	✓	✓	✓
Soft Start	✓	✓	✓
High dynamic response	-	-	✓
USB connection without external boards	-	-	✓

For a given motor start duty a smaller machine may be selected – also enhanced by low sub-transient reactance values for non-linear loads. The whole range is capable of >300% sustained short circuit current for up to 20 seconds.

Optional PMG

The Mecc Alte PMG is available on ECP28, ECP32, ECP34 and ECO38 as factory-fitted option; alternatively, only the predisposition for the retrofit, for subsequent assembly, is available on option. On series ECO40 is available as a factory-fitted or retro-fitted options.

The complete AVR range is fully compatible with both MAUX and PMG systems; this minimises spare parts management and flexibility of stock as one AVR suits all applications.


The PMG is delivering the same amount of kVA available with the MAUX.



General Data

Dew Heater

Our whole range can be fitted with anti-condensation heaters of adequate power sized to alternator kVA. Voltage for heaters must be specified when ordering. New cylindrical cartridge style heaters are available on request and it can be retrofitted.

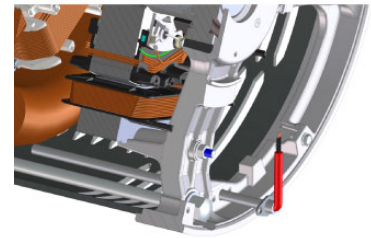

Accessories

Additional optionals can be fit on our alternator series, such as PTC thermistors or PT100 both on windings and bearings, dew heaters, high and low profile of terminal boxes (on most series), parallel devices (standard from ECO38), current and voltage transformers, air filters, IP43 and IP45 protections and many others.

For more info visit: <https://www.meccalte.com/en/products/alternators/accessories/c-type-accessories>

Deration coefficients

Altitude (meters)	Ambient temperature (Celsius)					
	25	40	45	50	55	60
≤ 1000	1.07	1	0.96	0.93	0.91	0.89
$> 1000 \leq 1500$	1.01	0.96	0.92	0.89	0.87	0.84
$> 1500 \leq 2000$	0.96	0.91	0.87	0.84	0.83	0.79
$> 2000 \leq 3000$	0.9	0.85	0.81	0.78	0.76	0.73

Notes on short circuit curves

The indicated coefficients have to be used to correct the three phase short circuit curves values as a function of the rated voltage.

The indicated coefficient have to be used to correct the three phase short circuit curves values as a function of the type of short circuit voltage.

50 Hz		60 Hz			3 phase	2 phase L-L	1 phase L-N
Voltage	Factor	Voltage	Factor				
380	0.93X	415	0.85X	Instantaneous	1X	0.87X	1.30X
400	1X	440	0.90X	Minimum	1X	1.80X	3.20X
415	1.04X	460	0.95X	Sustained	1X	1.50X	2.50X
440	1.10X	480	1X	Max Duration	20 sec.	10 sec.	4 sec.

All the curves are shown for series or parallel star connection at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to parallel star, the additional coefficient is 2X. From series star to series delta, it is 1.72X. From series star to parallel delta, it is 3.44X.

ECP32 4 C

General characteristics

Pole number	4	Insulation class	H
Phase number	3	Protection class	IP23
Number of wires	12	NDE Bearing type	6309-2RS
Execution	Brushless	DE Bearing type	6312-2RS
Regulator type	DSR	Maximum Overspeed	2250
Winding pitch	2/3	Altitude	0-1000
Code voltage reference	T0405S3	Balancing	ISO1940-1

Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																					
STANDBY-163/27						STANDBY-150/40				H-125/40				F-105/40				B-80/40			
Series	Star Y	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
Parallel	Star YY	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V	190V	200V	208V	220V
Series	Delta Δ	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V
Parallel	Delta ΔΔ	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V	110V	115V	120V	127V
ECP32 154 C	kVA	41	41	41	33	39	39	39	31,6	37,5	37,5	37,5	30	35	35	35	28	30	30	30	24
	kW	32,8	32,8	32,8	26,4	31,2	31,2	31,2	25,3	30	30	30	24	28	28	28	22,4	24	24	24	19,2
ECP32 254 C	kVA	50	50	49,5	37,5	48,7	48,7	48,7	36	45	45	45	34	41	41	41	33	36	36	36	27
	kW	40	40	39,6	30	39,0	39,0	39,0	28,8	36	36	36	27,2	32,8	32,8	32,8	26,4	28,8	28,8	28,8	21,6
ECP32 1M4 C	kVA	55	55	55	44	52,5	52,5	52,5	42	50	50	50	40	48	48	48	38	40	40	40	32
	kW	44	44	44	35,2	42	42	42	33,6	40	40	40	32	38,4	38,4	38,4	30,4	32	32	32	25,6
ECP32 2M4 C	kVA	68,8	68,8	68,8	52	65	65	65	49,5	62,5	62,5	62,5	47,5	59,5	59,5	59,5	42,6	50	50	50	38
	kW	55,0	55,0	55,0	41,6	52	52	52	39,6	50	50	50	38	47,6	47,6	47,6	34,1	40	40	40	30,4
ECP32 1L4 C	kVA	82,5	82,5	82,5	77	78	78	78	73	75	75	75	70	67	67	67	62	60	60	60	56
	kW	66	66	66	61,6	62,4	62,4	62,4	58,4	60	60	60	56	53,6	53,6	53,6	49,6	48	48	48	44,8
ECP32 2L4 C	kVA	91	91	91	85	85	85	85	79	82,5	82,5	82,5	77	73,2	73,2	73,2	68	66	66	66	62
	kW	72,8	72,8	72,8	68	68	68	68	63,2	66	66	66	61,6	58,6	58,6	58,6	54,4	52,8	52,8	52,8	49,6

Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																						
		STANDBY-163/27				STANDBY-150/40				H-125/40				F-105/40				B-80/40				
	Series	Star Y	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V
	Parallel	Star YY	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V	208V	220V	230V	240V
	Series	Delta Δ	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V
	Parallel	Delta ΔΔ	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V	120V	127V	133V	138V
ECP32 154 C	kVA	43,5	47	49,5	49,5	42	45	47	47	39,5	43	45	45	37	41	43	43	31,6	34,4	36	36	
	kW	34,8	37,6	39,6	39,6	33,6	36	37,6	37,6	31,6	34,4	36	36	29,6	32,8	34,4	34,4	25,3	27,5	28,8	28,8	
ECP32 254 C	kVA	52	55	59	59	50	53	57	57	47	50	54	54	43	48	52	52	37,6	40	43,2	43,2	
	kW	41,6	44	47,2	47,2	40	42,4	45,6	45,6	37,6	40	43,2	43,2	34,4	38,4	41,6	41,6	30,1	32	34,6	34,6	
ECP32 1M4 C	kVA	60,5	66	66	66	58	63	63	63	55	60	60	60	53	58	58	58	44	48	48	48	
	kW	48,4	52,8	52,8	52,8	46,4	50,4	50,4	50,4	44	48	48	48	42,4	46,4	46,4	46,4	35,2	38,4	38,4	38,4	
ECP32 2M4 C	kVA	76	80	82,5	82,5	71	74	77,5	77,5	69	72,5	75	75	63	70	71,5	71,5	55,2	58	60	60	
	kW	60,8	64	66	66	56,8	59	62	62	55,2	58	60	60	50,4	56	57,2	57,2	44,2	46	48	48	
ECP32 1L4 C	kVA	86	90	99	99	81	86	93,7	93,7	78	82	90	90	73	80	83	83	62,4	65,6	72	72	
	kW	68,8	72	79,2	79,2	64,8	68,8	75	75,0	62,4	65,6	72	72	58,4	64	66,4	66,4	49,9	52,5	57,6	57,6	
ECP32 2L4 C	kVA	97	106	110	110	90	98	102	102	88	96	100	100	81	89	92	92	70,4	76,8	80	80	
	kW	77,6	84,8	88	88	72	78,4	81,6	81,6	70,4	76,8	80	80	64,8	71,2	73,6	73,6	56,3	61,4	64	64	

Reactance & Time constants- Class H / 400V

Unsaturated (ref. EN60034-4)			ECP32 1S4 C	ECP32 2S4 C	ECP32 1M4 C	ECP32 2M4 C	ECP32 1L4 C	ECP32 2L4 C
X_d	Direct-axis synchronous reactance	%	316,7	339,3	316,3	276,3	368,2	376
X'_d	Direct-axis transient reactance	%	15,6	15,9	14,8	13,8	17,3	16,8
X''_d	Direct-axis subtransient reactance	%	11	11,9	8,7	8,1	10,1	8,7
X_q	Quadrature-axis synchronous reactance	%	101,7	110,5	123	113,9	142,9	147,9
X'_q	Quadrature-axis transient reactance	%	101,7	110,5	123	113,9	142,9	147,9
X''_q	Quadrature-axis subtransient reactance	%	33,7	34	34,9	33,8	42,2	43,1
X₂	Negative-sequence reactance	%	21,8	22,4	21,2	20,4	25,6	25,3
X₀	Zero sequence reactance	%	2,89	3,04	3,33	3,21	4,39	4,11
Saturated								
X_d	Direct-axis synchronous reactance	%	269,2	288,4	268,9	234,9	313	319,6
X'_d	Direct-axis transient reactance	%	13,3	13,5	12,6	11,7	14,7	14,3
X''_d	Direct-axis subtransient reactance	%	9,35	10,1	7,4	6,88	8,58	7,4
X_q	Quadrature-axis synchronous reactance	%	86,4	93,9	104,6	96,8	121,5	125,7
X'_q	Quadrature-axis transient reactance	%	86,4	93,9	104,6	96,8	121,5	125,7
X''_q	Quadrature-axis subtransient reactance	%	28,6	28,9	29,7	28,7	35,9	36,6
X₂	Negative-sequence reactance	%	18,5	19	18	17,3	21,8	21,5
X₀	Zero sequence reactance	%	2,89	3,04	3,33	3,21	4,39	4,11
K_{cc}	Short circuit ratio		0,37	0,35	0,37	0,43	0,32	0,31
T'_d	Transient time constant	sec	0,056	0,059	0,062	0,055	0,081	0,074
T''_d	Subtransient time constant	sec	0,012	0,014	0,014	0,011	0,016	0,016
T'_{do}	Open circuit time constant	sec	1,14	1,26	1,31	1,1	1,73	1,67
T_a	Armature time constant	sec	0,013	0,016	0,018	0,016	0,022	0,022

Additional information - Class H / 400V

I_o	Excitation current at no load	A	0,6	0,8	0,7	0,7	0,7	0,6
I_c	Excitation current at full load	A	2,7	2,8	2,5	2,6	2,9	2,9
Overload								
Overload per 20 sec.			300					
Heat dissipation	W		4247	5096	5300	5928	6741	7333
Telephone Harmonic Factor - THF	%		<2	<2	<2	<2	<2	<2
Waveform Distors.(THD) full load LL/LN	%		2,8 / 2,8	1,9 / 2	1,8 / 1,9	2,1 / 2,1	2,2 / 2,2	2,9 / 2,9
Waveform Distors.(THD) no load LL/LN	%		3 / 3,1	2,7 / 2,6	2,6 / 2,6	2,7 / 2,7	2,9 / 2,9	2,5 / 2,5

Reactance & Time constants- Class H / 480V

Unsaturated (ref. EN60034-4)			ECP32 1S4 C	ECP32 2S4 C	ECP32 1M4 C	ECP32 2M4 C	ECP32 1L4 C	ECP32 2L4 C
X_d	Direct-axis synchronous reactance	%	316,7	339,3	316,3	276,3	368,2	379,8
X'_d	Direct-axis transient reactance	%	15,6	15,9	14,8	13,8	17,3	17
X''_d	Direct-axis subtransient reactance	%	11	11,9	8,7	8,1	10,1	8,79
X_q	Quadrature-axis synchronous reactance	%	101,7	110,5	123	113,9	142,9	149,4
X'_q	Quadrature-axis transient reactance	%	101,7	110,5	123	113,9	142,9	149,4
X''_q	Quadrature-axis subtransient reactance	%	33,7	34	34,9	33,8	42,2	43,5
X₂	Negative-sequence reactance	%	21,8	22,4	21,2	20,4	25,6	25,6
X₀	Zero sequence reactance	%	2,89	3,04	3,33	3,21	4,39	4,15
Saturated								
X_d	Direct-axis synchronous reactance	%	269,2	288,4	268,9	234,9	313	322,8
X'_d	Direct-axis transient reactance	%	13,3	13,5	12,6	11,7	14,7	14,4
X''_d	Direct-axis subtransient reactance	%	9,35	10,1	7,4	6,88	8,58	7,47
X_q	Quadrature-axis synchronous reactance	%	86,4	93,9	104,6	96,8	121,5	127
X'_q	Quadrature-axis transient reactance	%	86,4	93,9	104,6	96,8	121,5	127
X''_q	Quadrature-axis subtransient reactance	%	28,6	28,9	29,7	28,7	35,9	37
X₂	Negative-sequence reactance	%	18,5	19	18	17,3	21,8	21,8
X₀	Zero sequence reactance	%	2,89	3,04	3,33	3,21	4,39	4,15
K_{cc}	Short circuit ratio		0,37	0,35	0,37	0,43	0,32	0,31
T'_d	Transient time constant	sec	0,056	0,059	0,062	0,055	0,081	0,074
T''_d	Subtransient time constant	sec	0,012	0,014	0,014	0,011	0,016	0,016
T'_{do}	Open circuit time constant	sec	1,14	1,26	1,31	1,1	1,73	1,67
T_a	Armature time constant	sec	0,013	0,016	0,018	0,016	0,022	0,022







Additional information - Class H / 480V

I_o	Excitation current at no load	A	0,6	0,8	0,7	0,7	0,7	0,6
I_c	Excitation current at full load	A	2,7	2,8	2,5	2,6	2,9	2,9
Overload								
Overload per 20 sec.		%	300					
Heat dissipation	W		5096	6171	5691	6519	7295	8106
Telephone Interference Factor - TIF			<45	<45	<45	<45	<45	<45
Waveform Distors.(THD) full load LL/LN	%		2,8 / 2,8	1,9 / 2	1,8 / 1,9	2,1 / 2,1	2,2 / 2,2	2,9 / 2,9
Waveform Distors.(THD) no load LL/LN	%		3 / 3,1	2,7 / 2,6	2,6 / 2,6	2,7 / 2,7	2,9 / 2,9	2,5 / 2,5

ECP32 4 C

Efficiencies @ 50Hz







Models		380V 50Hz					400V 50Hz					415V 50Hz					440V 50Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECP32 1S4 C	%	85,9	88,9	88,7	87,7	87,2	85,9	89,0	88,7	87,6	87,1	85,7	88,9	88,7	87,4	87,0	85,5	88,9	88,2	86,9	86,4
ECP32 2S4 C	%	85,9	88,9	88,7	87,7	87,2	85,9	89,0	88,7	87,6	87,1	85,9	89,0	88,7	87,6	87,1	85,5	88,9	88,2	86,9	86,4
ECP32 1M4 C	%	89,1	89,5	89,2	88,2	87,8	89,6	89,7	89,5	88,3	87,8	89,3	89,5	89,3	88,0	87,6	88,6	88,9	88,7	87,5	86,9
ECP32 2M4 C	%	90,7	91,5	90,5	89,3	88,8	90,6	91,7	90,7	89,4	88,8	90,3	91,4	90,3	89,2	88,6	89,6	90,6	89,5	88,3	87,7
ECP32 1L4 C	%	91,5	91,6	90,8	89,9	89,4	91,4	91,8	91,0	89,9	89,4	91,2	91,7	90,9	89,6	89,0	90,8	91,6	90,5	89,3	88,7
ECP32 2L4 C	%	91,8	91,9	90,9	89,9	89,4	91,7	92,1	91,2	90,0	89,5	91,3	91,9	91,0	89,6	89,0	91,0	91,9	90,6	89,3	88,7

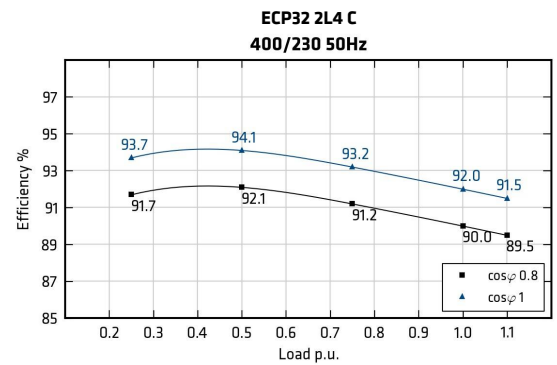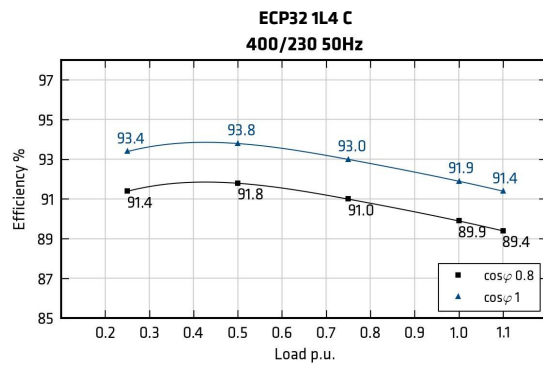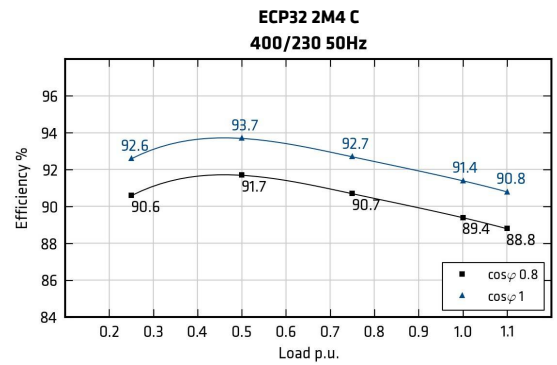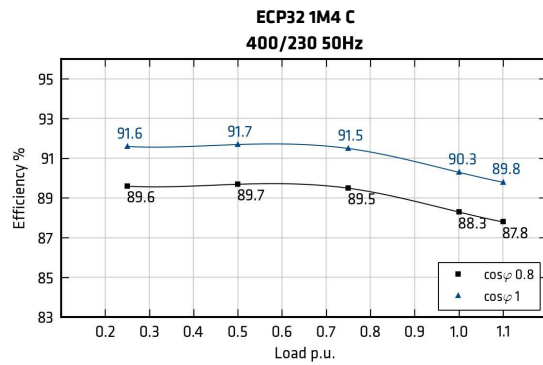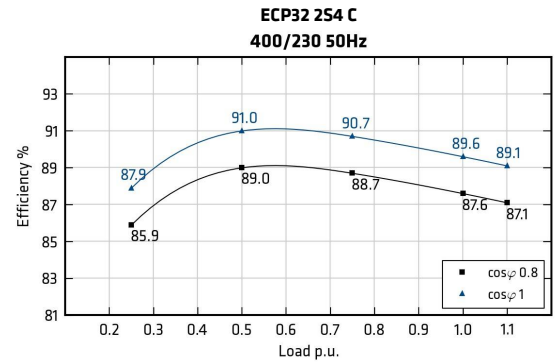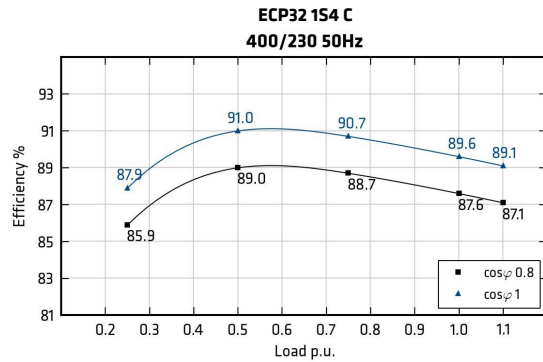


ECP32 4 C

Efficiencies @ 60Hz

Models		415V 60Hz					440V 60Hz					460V 60Hz					480V 60Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECP32 1S4 C	%	87,6	89,2	87,8	86,5	86,1	88,4	89,7	88,3	87,0	86,6	88,8	90,2	88,7	87,4	87,1	88,8	90,2	88,7	87,6	87,3
ECP32 2S4 C	%	87,6	89,1	87,7	86,5	86,0	88,4	89,6	88,3	87,1	86,6	88,8	90,1	88,7	87,6	87,1	88,8	90,1	88,7	87,5	87,2
ECP32 1M4 C	%	88,4	89,6	89,6	87,5	86,7	88,5	89,7	89,9	88,9	88,2	88,5	89,9	90,3	89,2	88,6	88,6	90,2	90,5	89,4	88,9
ECP32 2M4 C	%	90,5	91,2	90,5	89,5	89,1	90,9	91,5	90,7	89,7	89,2	91,1	91,6	91,0	90,0	89,5	91,5	92,0	91,3	90,2	89,8
ECP32 1L4 C	%	91,3	91,9	91,1	90,1	89,5	91,4	92,0	91,3	90,5	90,1	91,4	92,1	91,6	90,7	90,2	91,1	92,2	91,8	90,8	90,3
ECP32 2L4 C	%	91,5	92,0	91,2	90,1	89,7	91,5	92,1	91,4	90,5	90,2	91,4	92,1	91,6	90,7	90,4	91,3	92,3	91,8	90,8	90,4

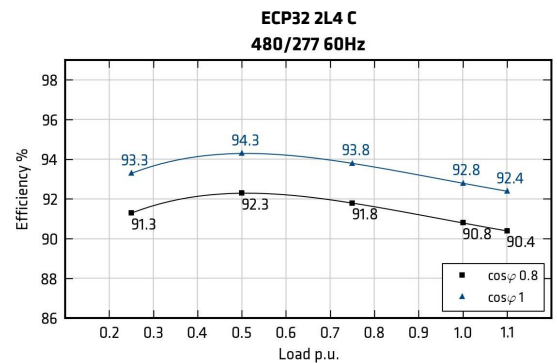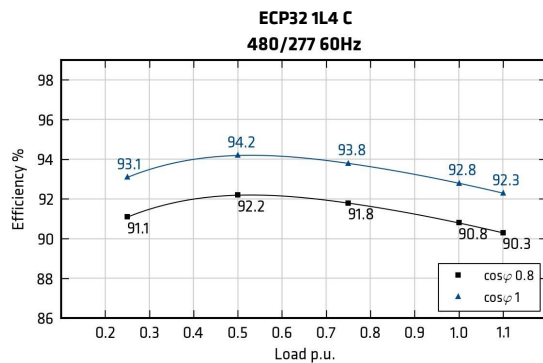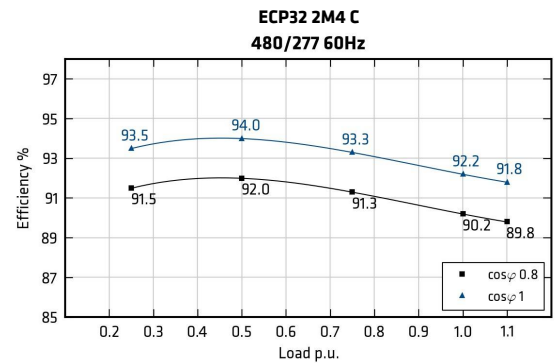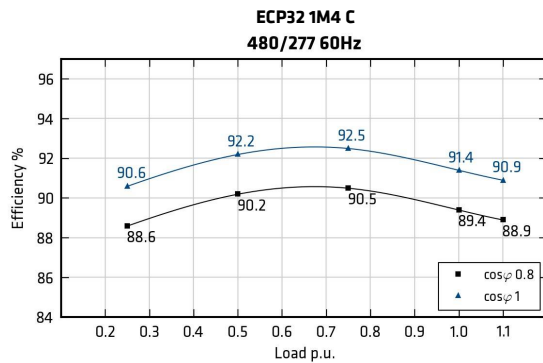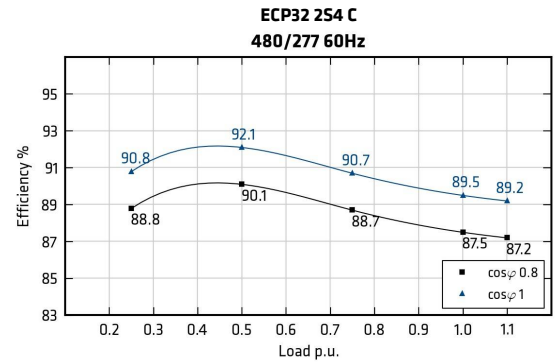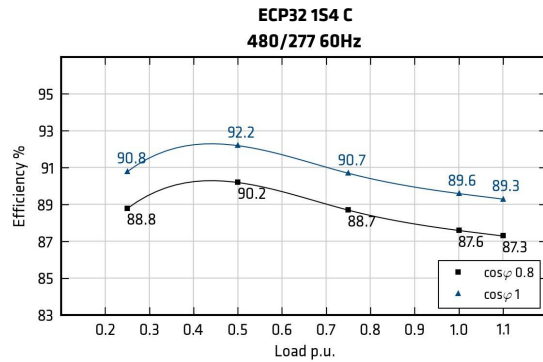

Transients voltage

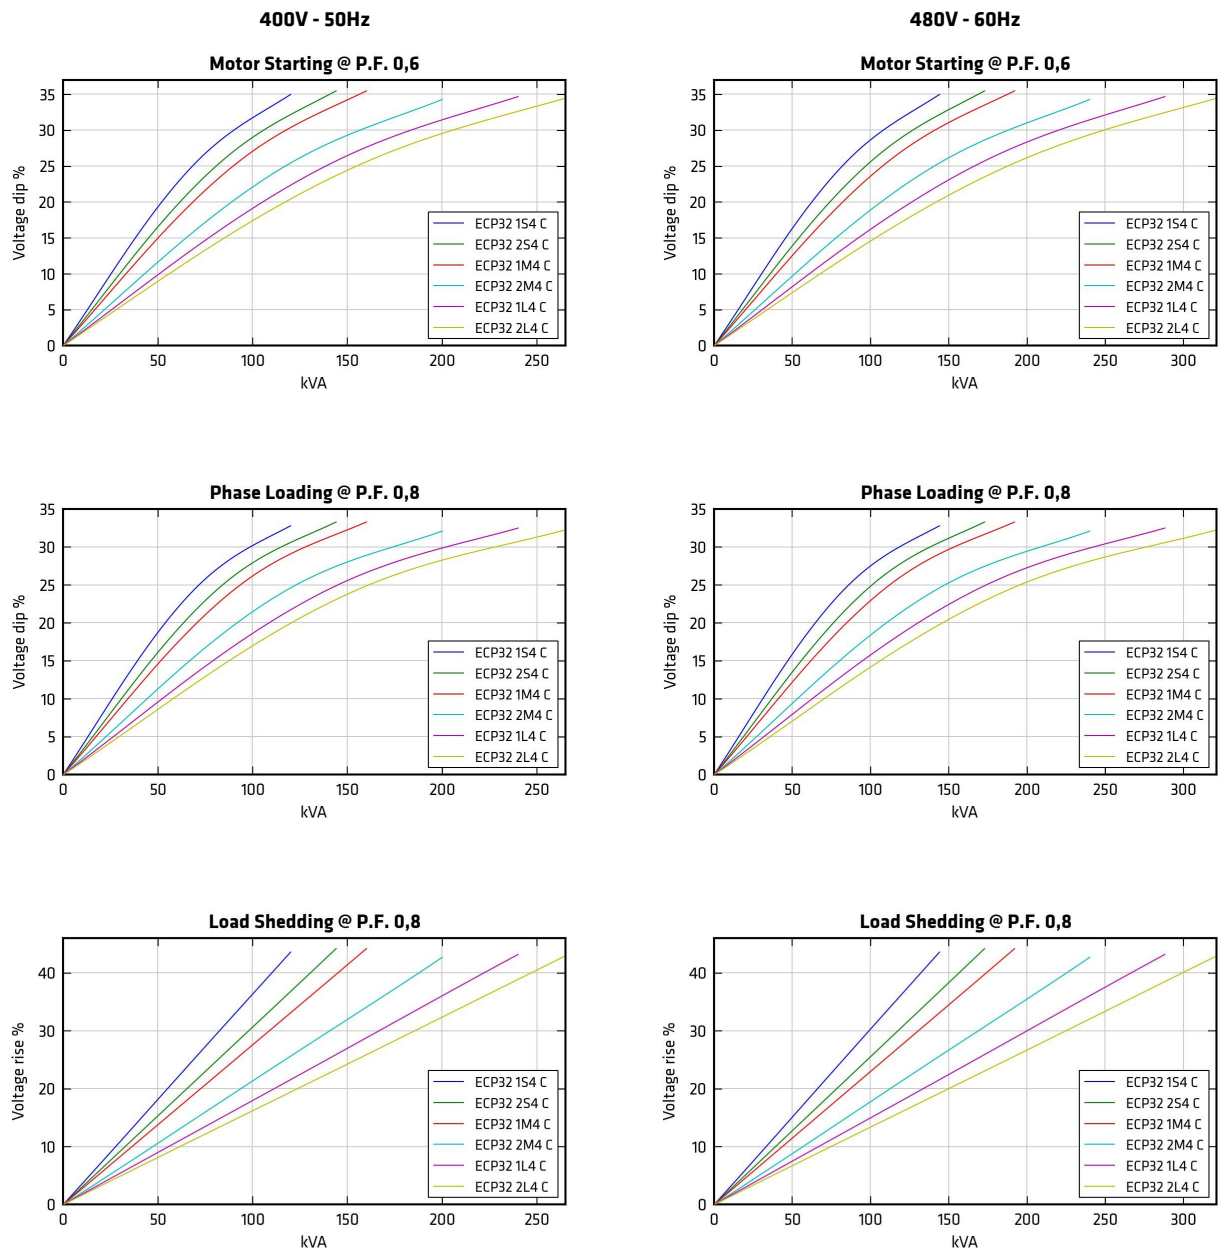

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$PFCC = \sin(\text{ARCCos}(\text{PFnew}))/0.8$$

Example. The PFCC at power factor 0.3 is 1.192 [$PFCC = \sin(\text{ARCCos}(0.3))/0.8$]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value.).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):

$$VCC = (400/V_{\text{new}})^2 \text{ if } 50 \text{ Hz}; VCC = (480/V_{\text{new}})^2 \text{ if } 60 \text{ Hz}$$


Example. VCC at 415V 60 Hz is 1.338 [$VCC = (480/415)^2$]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value.).

In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133kVA load insertion at 480V.


ECP32 4 C

50Hz Short circuit decrement curves - No load excitation at rated speed


ECP32 1S4 C

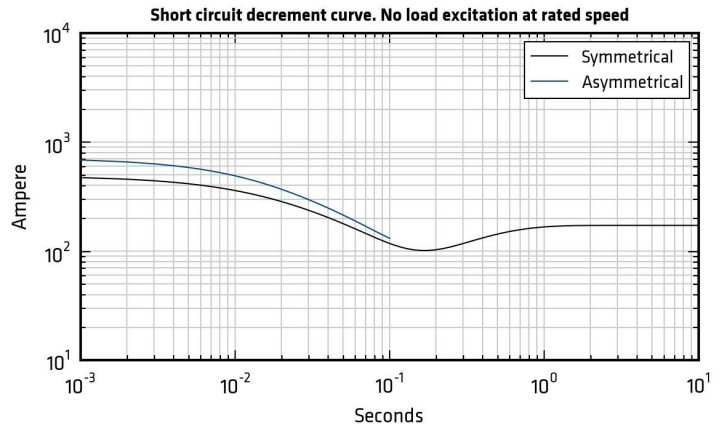


ECP32 2S4 C

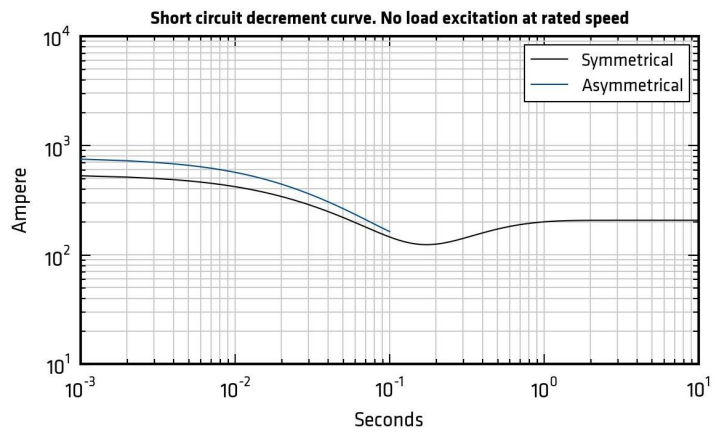

ECP32 1M4 C

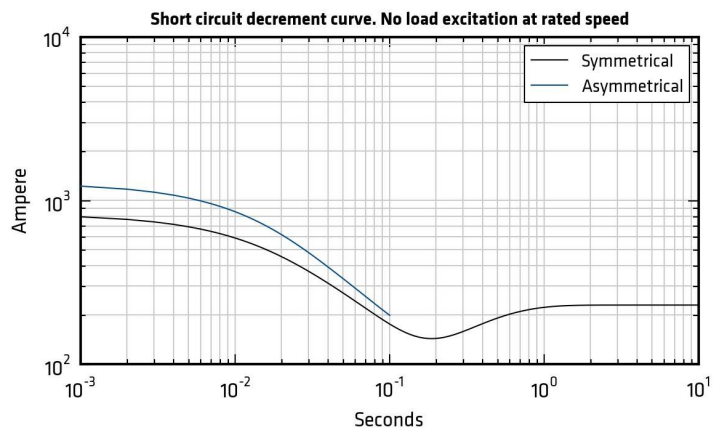

ECP32 2M4 C

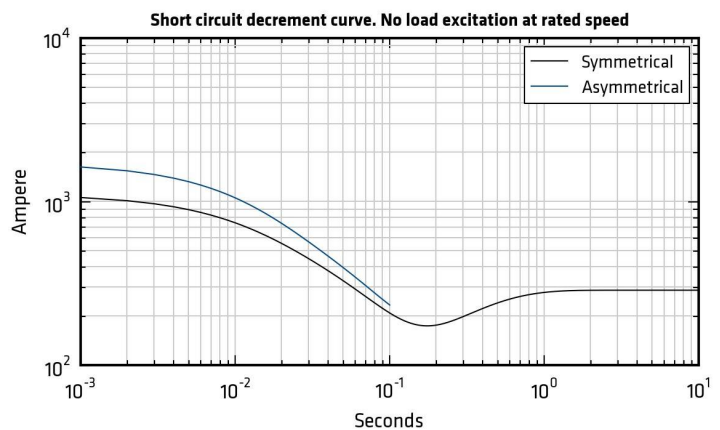


*Please refer to tables at page 6


ECP32 4 C

50Hz Short circuit decrement curves - No load excitation at rated speed

ECP32 1L4 C

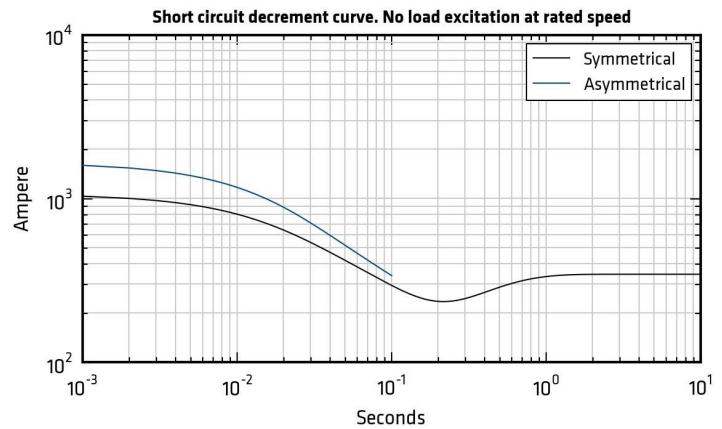

ECP32 2L4 C

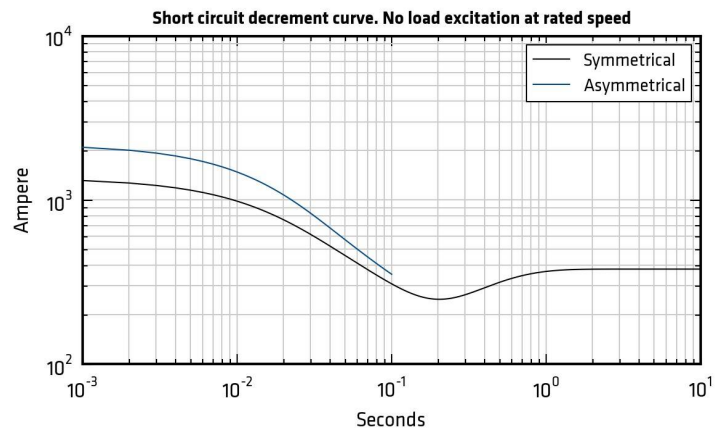


*Please refer to tables at page 6


ECP32 4 C

60Hz Short circuit decrement curves - No load excitation at rated speed


ECP32 1S4 C

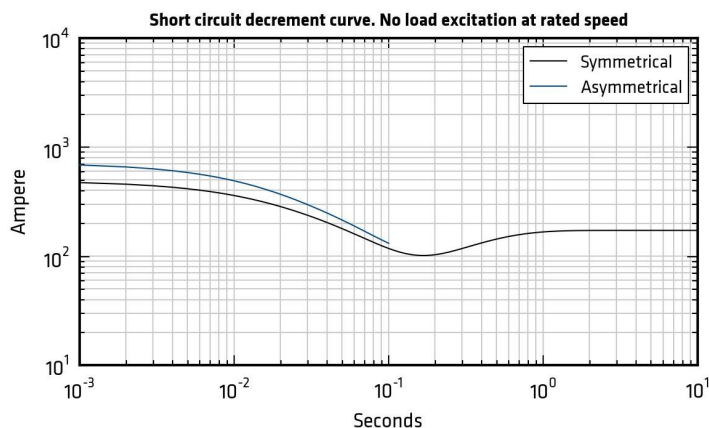


ECP32 2S4 C

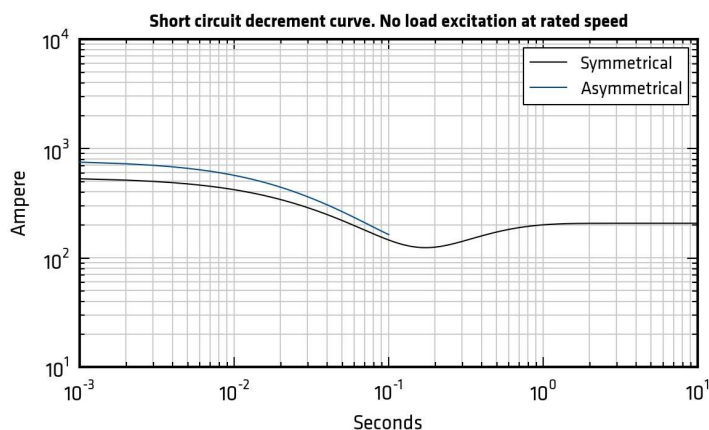

ECP32 1M4 C

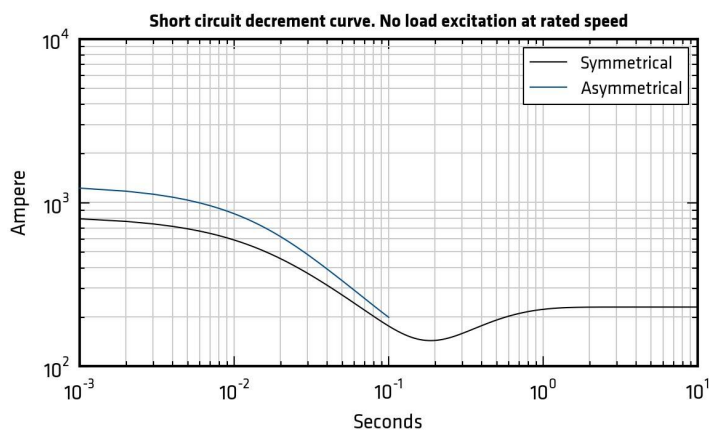

ECP32 2M4 C

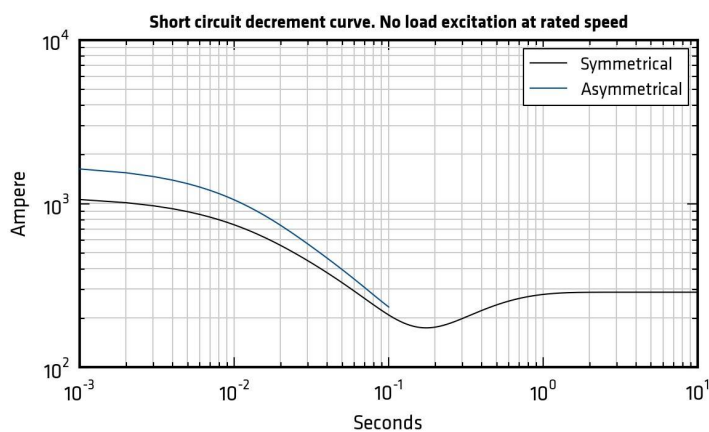


*Please refer to tables at page 6


ECP32 4 C

60Hz Short circuit decrement curves - No load excitation at rated speed

ECP32 1L4 C

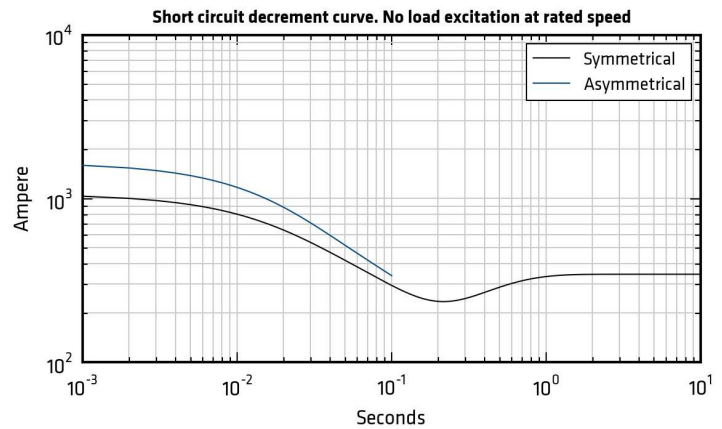

ECP32 2L4 C

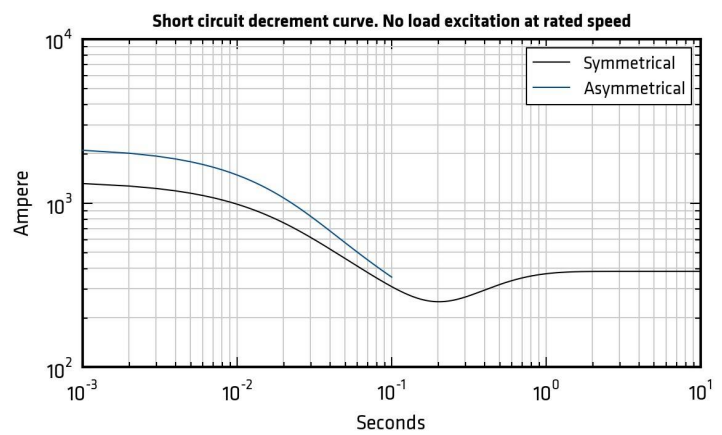


*Please refer to tables at page 6

Additional Characteristics

Data		ECP32 1S4 C		ECP32 2S4 C		ECP32 1M4 C		ECP32 2M4 C		ECP32 1L4 C		ECP32 2L4 C	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
Damper cage		Aluminium											
Stator Winding Resistance (20°C)	Ω	0,117		0,08		0,059		0,053		0,039		0,035	
Rotor Winding Resistance (20°C)	Ω	1,067		1,159		1,275		1,576		1,668		1,715	
Stator Exciter Resistance (20°C)	Ω	10,6		10,6		10,6		10,6		10,6		10,6	
Rotor Exciter Resistance (20°C)	Ω	0,417		0,417		0,417		0,417		0,417		0,417	
Weight of complete generator	kg	153,0		165,0		186,0		212,0		244,0		252,0	
Unbalanced magnetic pull	kN/mm	4,5		4,5		4,6		4,6		4,9		5,2	
Air flow	m³/min	15,7	18,5	15,7	18,5	15,7	18,5	15,7	18,5	15,7	18,5	15,7	18,5
Noise level at 1m/7m	dB(A)	72/58	76/62	72/58	76/62	72/58	76/62	72/58	76/62	72/58	76/62	72/58	76/62


PQ Diagram

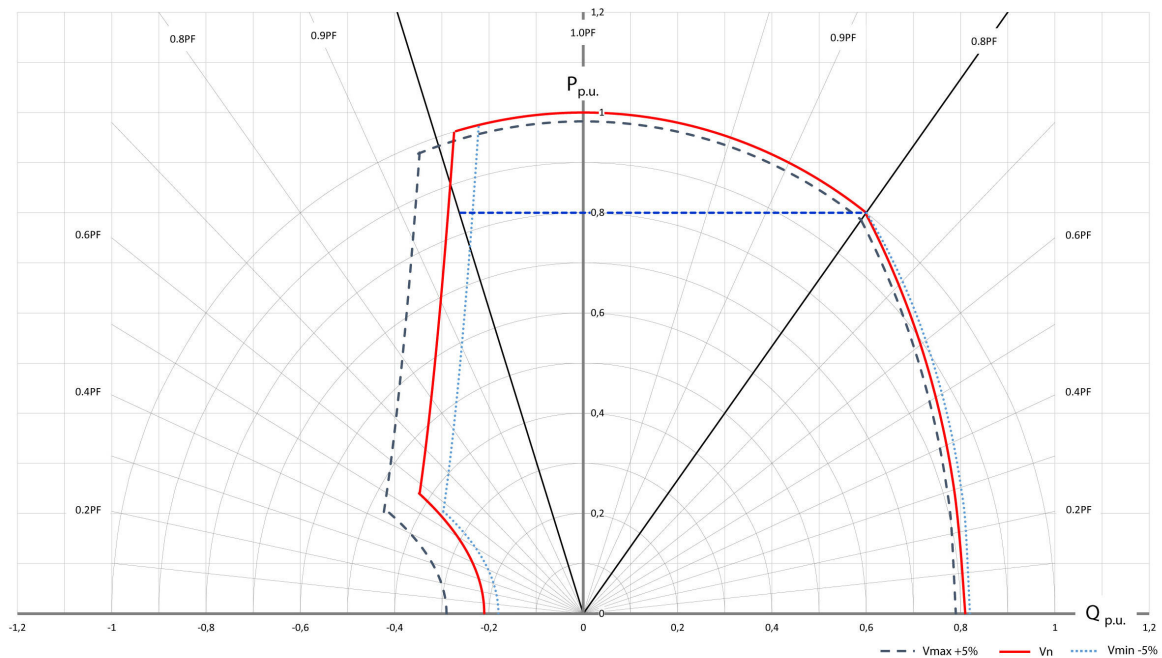

ECP32 4 C


ECP32 1S4 C

TWO BEARING MOMENTS OF INERTIA

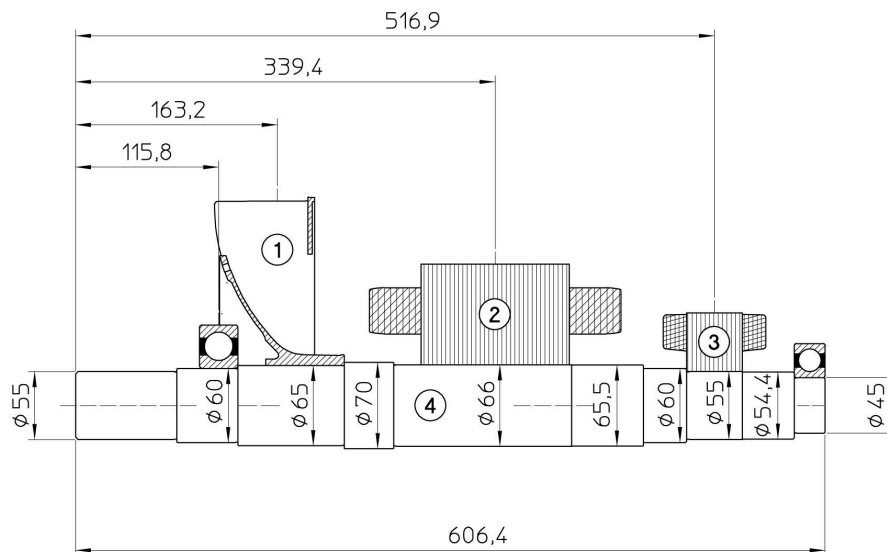


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	33.8	0.2268
3	EX. ROTOR	5.5	0.0172
4	SHAFT	13.7	0.0068
TOTAL		54.0	0.2622

TWO BEARING DIMENSIONS

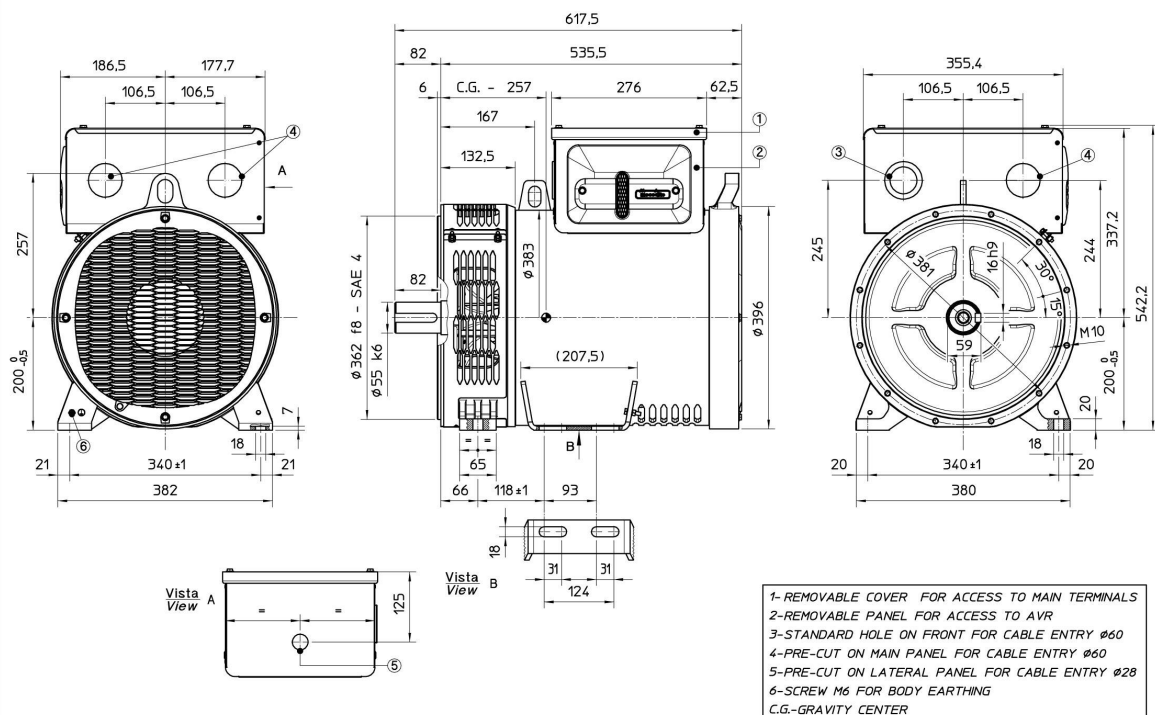

SINGLE BEARING MOMENTS OF INERTIA

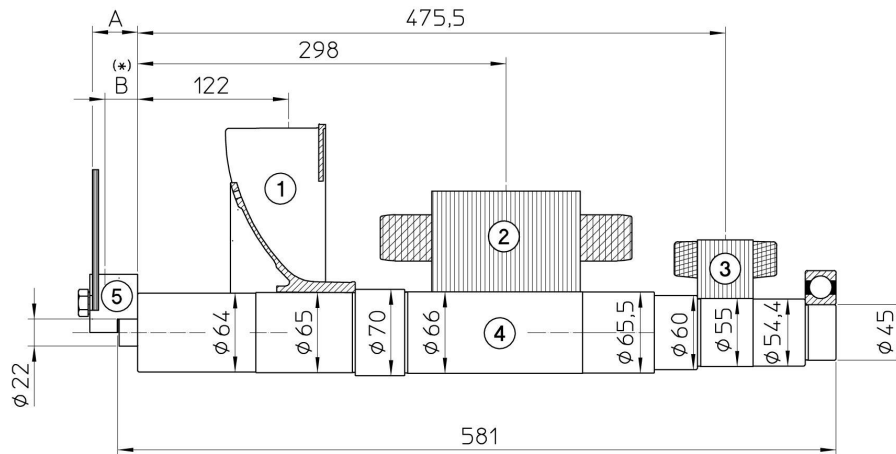


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	33.8	0.2268
3	EX. ROTOR	5.5	0.0172
4	SHAFT	13.4	0.0068
TOTAL		53.7	0.2622

SAE N°	A	B	WEIGHT kg	J kgm ²
6 1/2	5	2.2	1.7	0.0084
7 1/2	5	2.2	2.1	0.0130
8	36.6	25.9	4.0	0.0203
10	28.6	21.6	4.5	0.0385
11 1/2	15	11.5	4.5	0.0590

(*) = FLYWHEEL GRAVITY CENTER

SINGLE BEARING DIMENSIONS

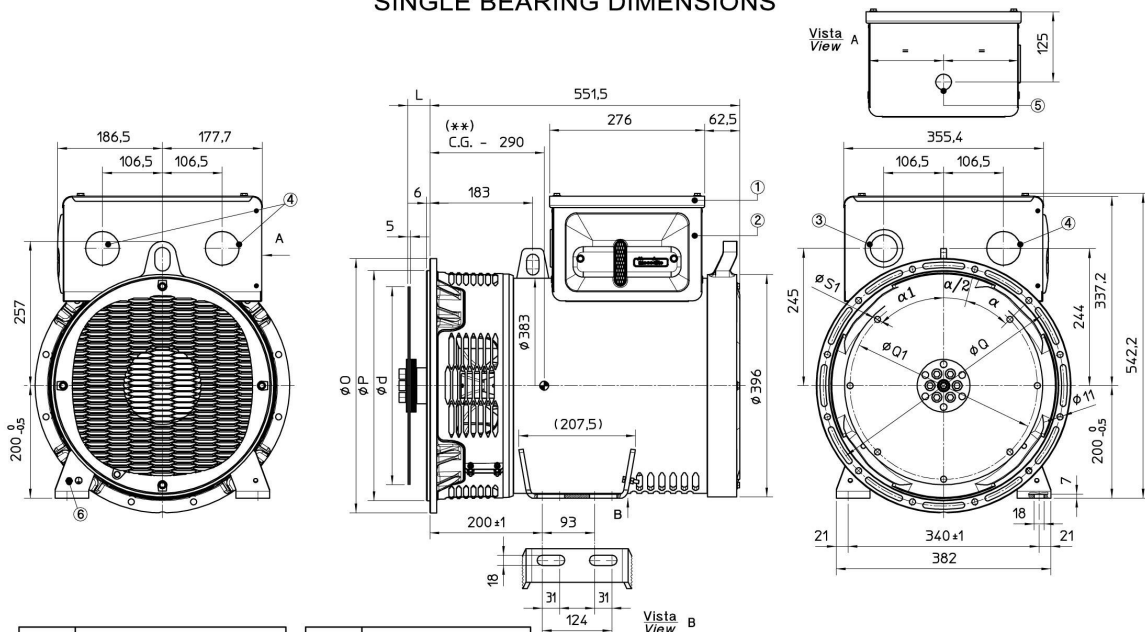

SAE N.	d	L	Q1	S1	α1
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°


SAE N.	O	P	Q	α
5	356	314.3	333.4	45°
4	402	362	381	30°
3	453	409.6	428.6	30°
2	490	447.7	466.7	30°
1	553	511.2	530.2	30°

- 1-REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
 2-REMOVABLE PANEL FOR ACCESS TO AVR
 3-STANDARD HOLE ON FRONT FOR CABLE ENTRY Ø48
 4-PRE-CUT ON MAIN PANEL FOR CABLE ENTRY Ø48
 5-PRE-CUT ON LATERAL PANEL FOR CABLE ENTRY Ø28
 6-SCREW M6 FOR BODY EARTHING
 (**)-GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11 1/2

ECP32 4 C


ECP32 2S4 C

TWO BEARING MOMENTS OF INERTIA

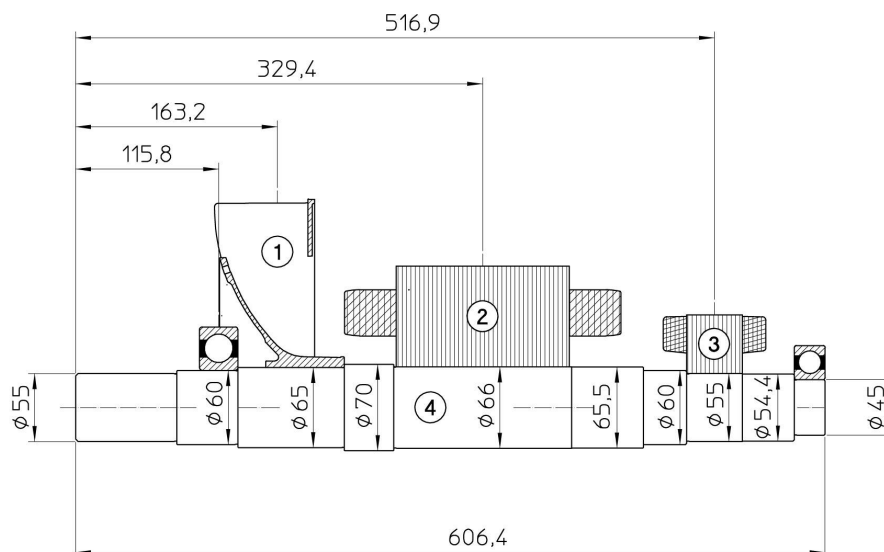

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	38.3	0.2567
3	EX. ROTOR	5.5	0.0172
4	SHAFT	13.7	0.0068
TOTAL		58.5	0.2921


TWO BEARING DIMENSIONS

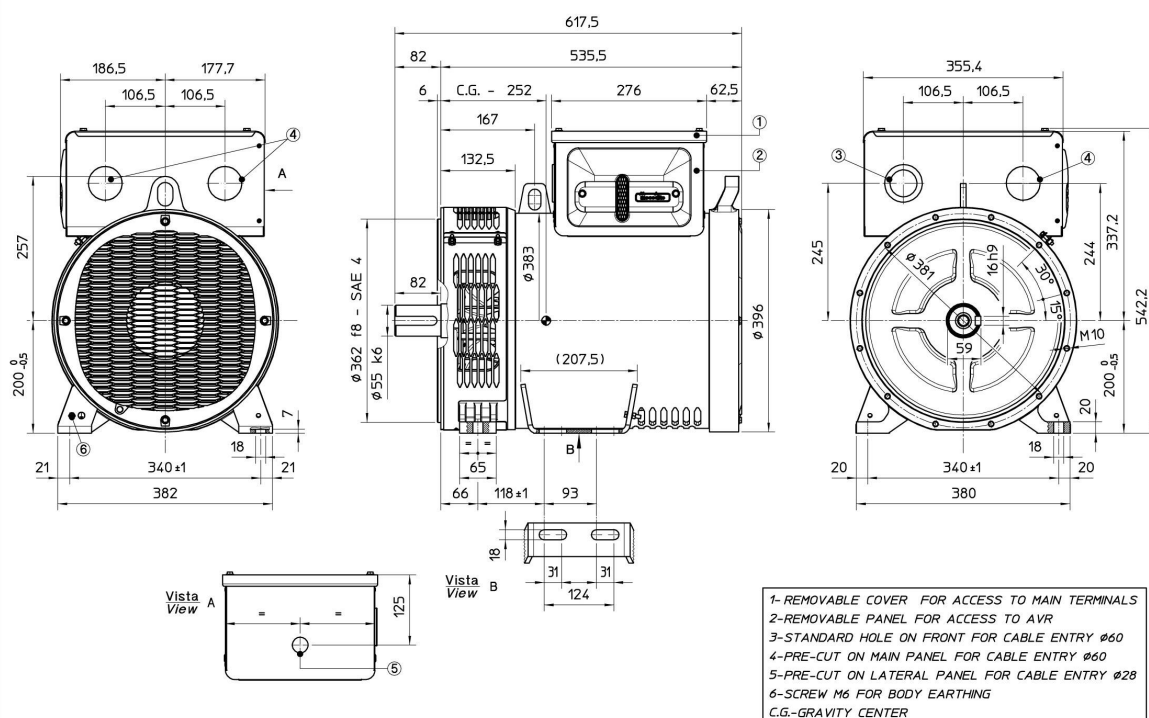

ECP32 4 C

ECP32 2S4 C

SINGLE BEARING MOMENTS OF INERTIA

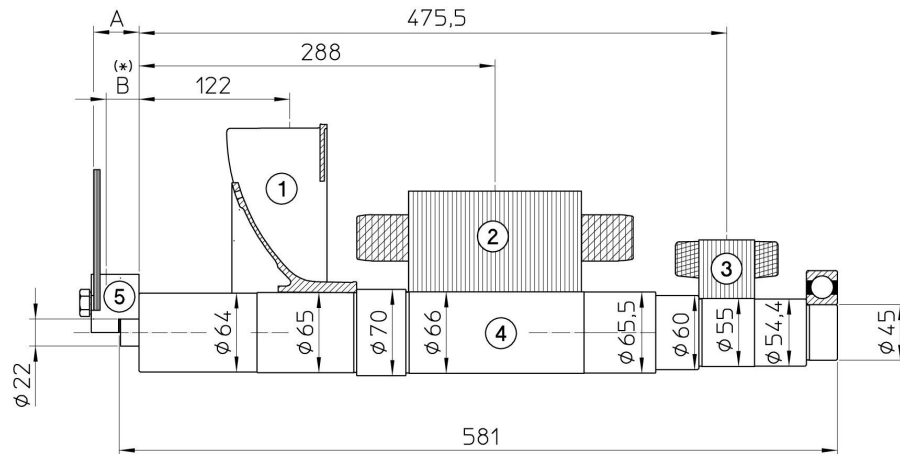


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	38.3	0.2567
3	EX. ROTOR	5.5	0.0172
4	SHAFT	13.4	0.0068
TOTAL		58.2	0.2921

SAE N°	5 SHAFTS COUPLING FLEX PLATE			
	A	B	WEIGHT kg	J kgrn ²
6 1/2	5	2.2	1.7	0.0084
7 1/2	5	2.2	2.1	0.0130
8	36.6	25.9	4.0	0.0203
10	28.6	21.6	4.5	0.0385
11 1/2	15	11.5	4.5	0.0590

(*) = FLYWHEEL GRAVITY CENTER

SINGLE BEARING DIMENSIONS

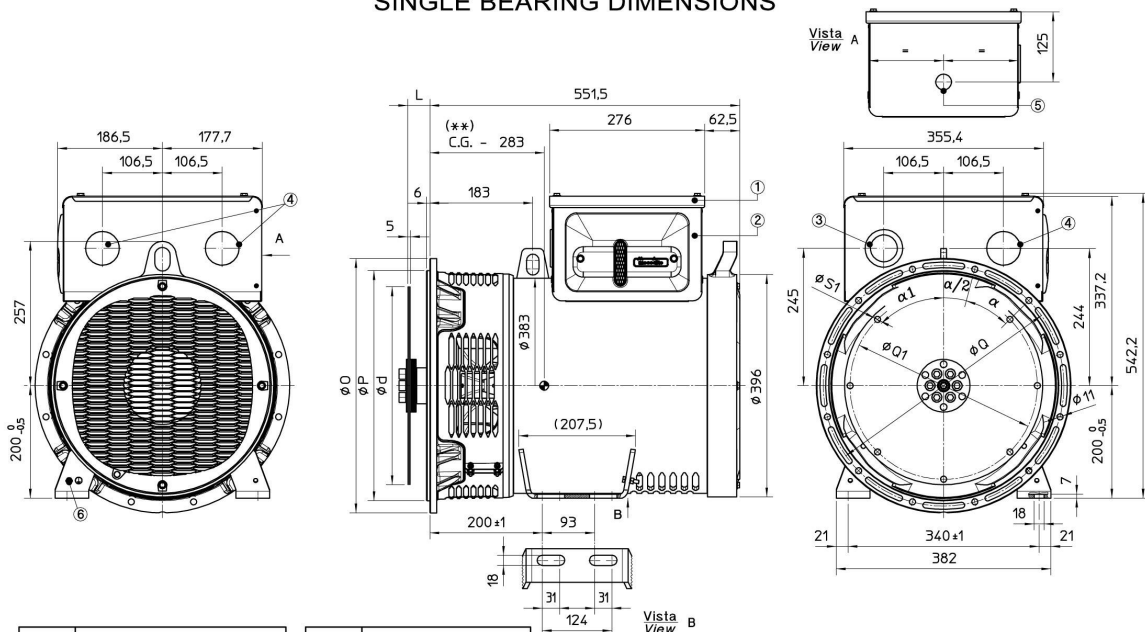

SAE N.	GIUNTI A DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG				
	d	L	Q1	S1	$\alpha 1$
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	FLANGIA / LANGE BRIDE / FLANSCH			
	O	P	Q	α
5	356	314.3	333.4	45°
4	402	362	381	30°
3	453	409.6	428.6	30°
2	490	447.7	466.7	30°
1	553	511.2	530.2	30°


- 1-REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
2-REMOVABLE PANEL FOR ACCESS TO AVR
3-STANDARD HOLE ON FRONT FOR CABLE ENTRY Ø60
4-PRE-CUT ON MAIN PANEL FOR CABLE ENTRY Ø60
5-PRE-CUT ON LATERAL PANEL FOR CABLE ENTRY Ø28
6-SCREW M6 FOR BODY EARTHING

(**)—GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11 1/2

ECP32 4 C


ECP32 1M4 C

TWO BEARING MOMENTS OF INERTIA

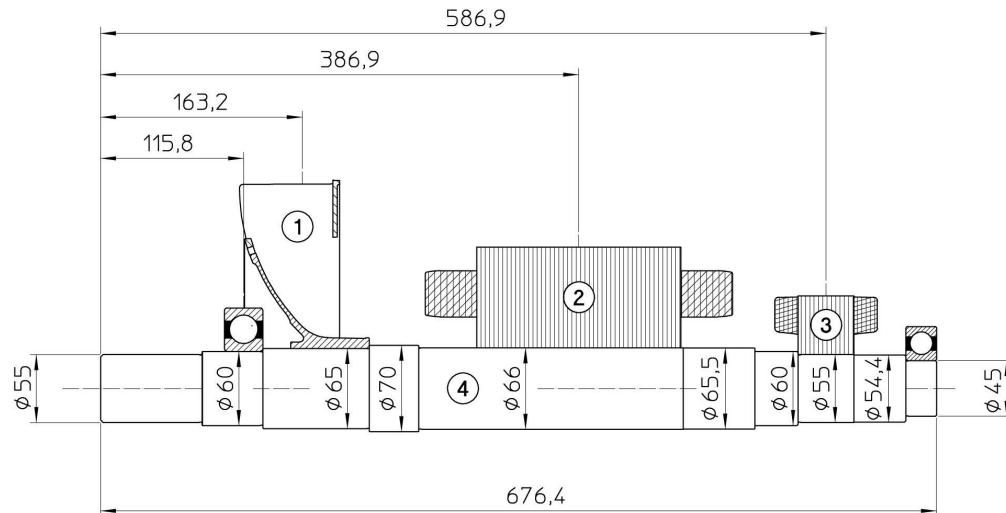

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	44.1	0.2955
3	EX. ROTOR	5.5	0.0172
4	SHAFT	15.5	0.0077
	TOTAL	66.1	0.3318


TWO BEARING DIMENSIONS

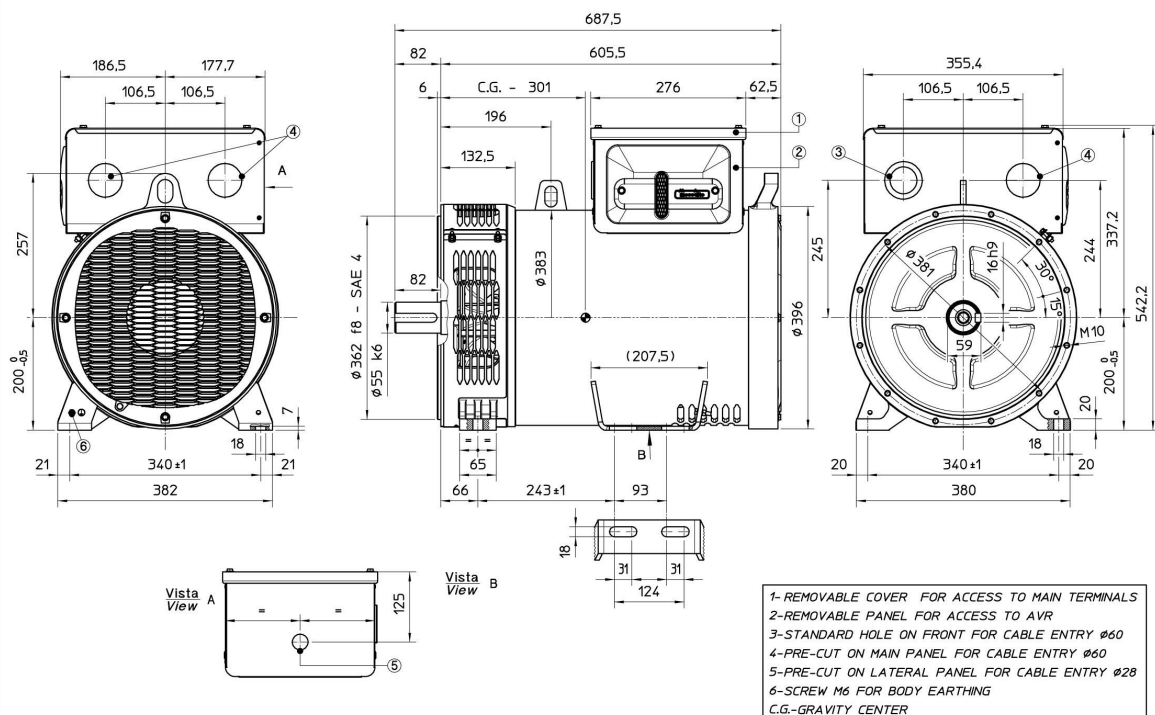

ECP32 4 C


ECP32 2M4 C

TWO BEARING MOMENTS OF INERTIA

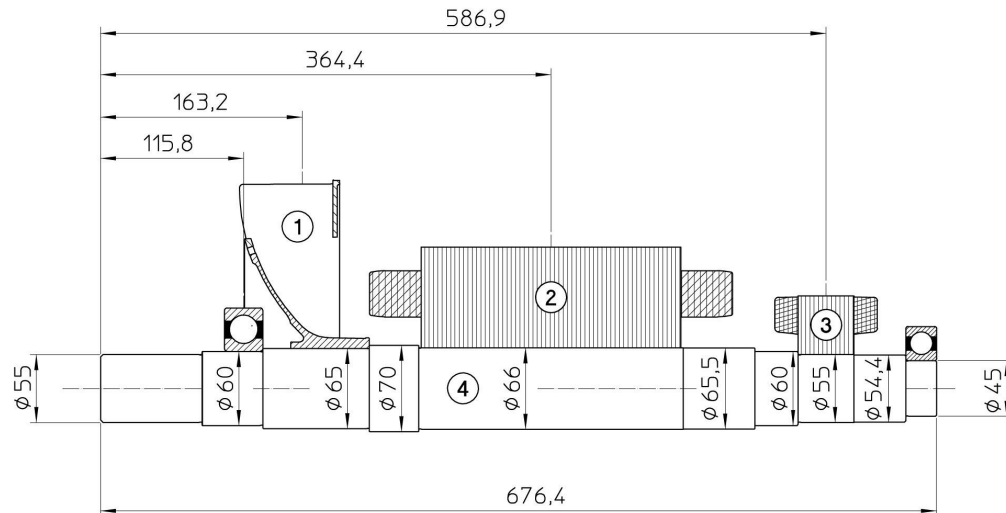

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	54.3	0.3629
3	EX. ROTOR	5.5	0.0172
4	SHAFT	15.5	0.0077
	TOTAL	76.3	0.3992


TWO BEARING DIMENSIONS

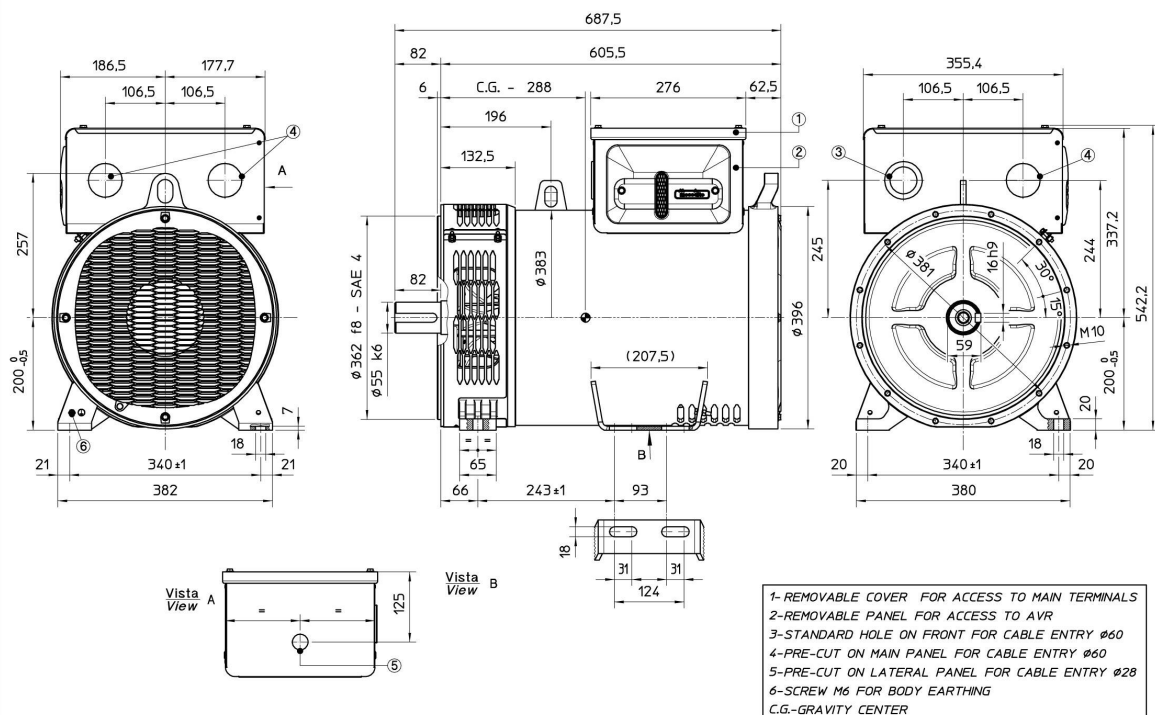

ECP32 4 C

ECP32 2M4 C

SINGLE BEARING MOMENTS OF INERTIA

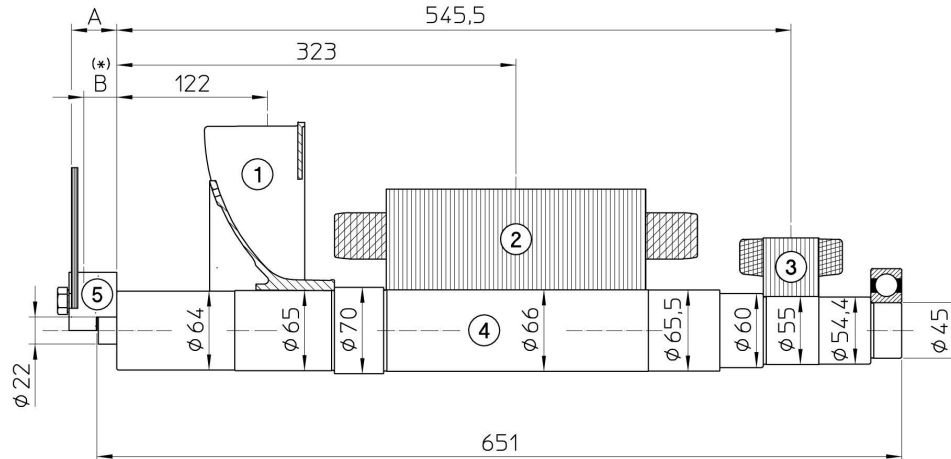


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	54.3	0.3629
3	EX. ROTOR	5.5	0.0172
4	SHAFT	15.2	0.0078
TOTAL		76.0	0.3993

SAE N°	A	B	WEIGHT kg	J kgm ²
6 1/2	5	2.2	1.7	0.0084
7 1/2	5	2.2	2.1	0.0130
8	36.6	25.9	4.0	0.0203
10	28.6	21.6	4.5	0.0385
11 1/2	15	11.5	4.5	0.0590

(*) = FLYWHEEL GRAVITY CENTER

SINGLE BEARING DIMENSIONS

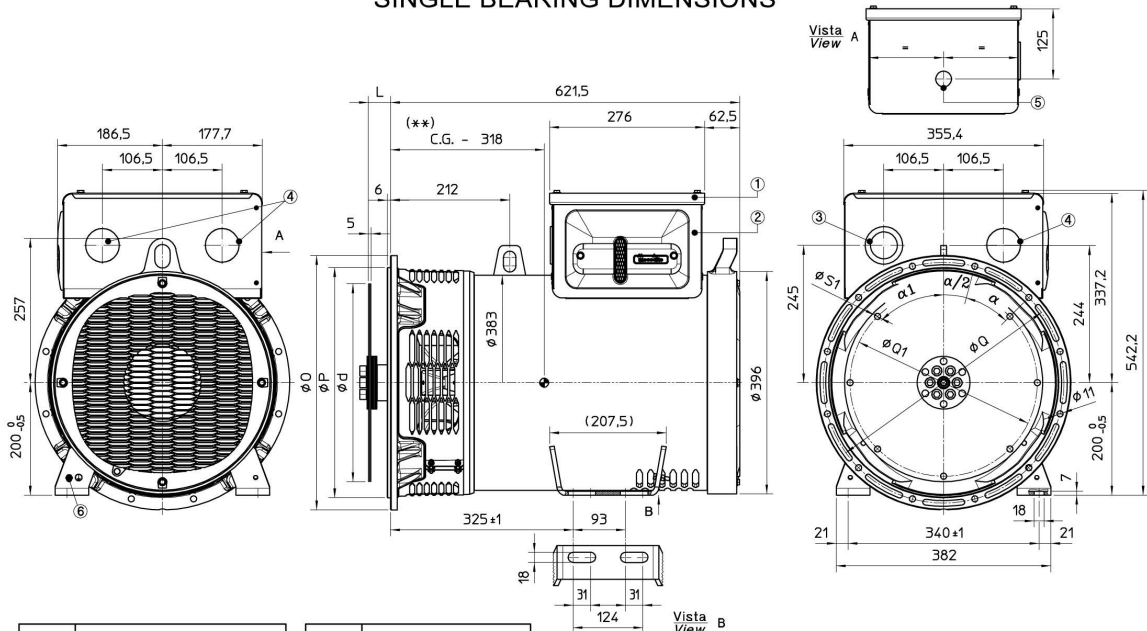

SAE N.	d	L	Q1	S1	α1
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°


SAE N.	O	P	Q	α
5	356	314.3	333.4	45°
4	402	362	381	30°
3	453	409.6	428.6	30°
2	490	447.7	466.7	30°
1	553	511.2	530.2	30°

- 1-REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
- 2-REMOVABLE PANEL FOR ACCESS TO AVR
- 3-STANDARD HOLE ON FRONT FOR CABLE ENTRY Ø60
- 4-PRE-CUT ON MAIN PANEL FOR CABLE ENTRY Ø60
- 5-PRE-CUT ON LATERAL PANEL FOR CABLE ENTRY Ø28
- 6-SCREW M6 FOR BODY EARTHING
- (**) - GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11 1/2

ECP32 4 C


ECP32 1L4 C

TWO BEARING MOMENTS OF INERTIA

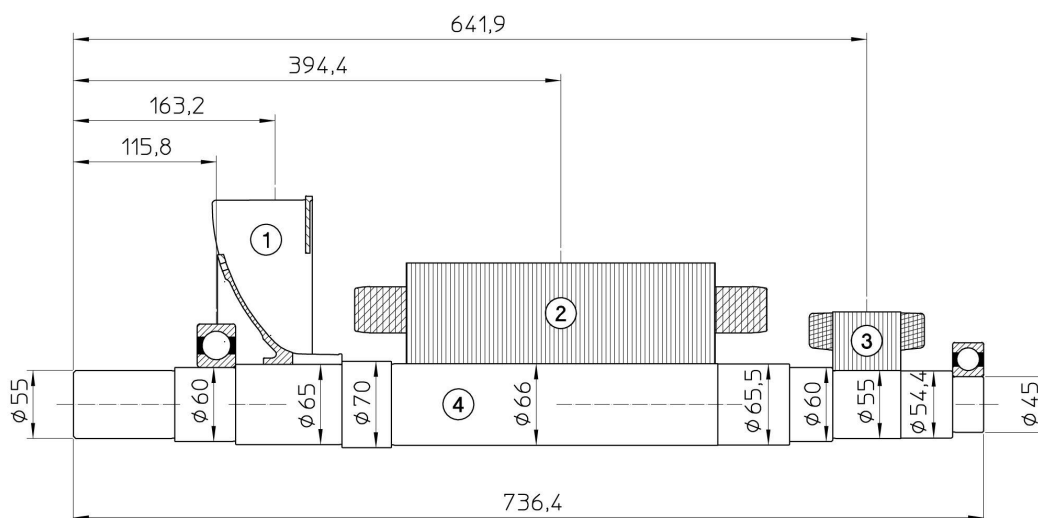

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	63.3	0.4225
3	EX. ROTOR	6.5	0.0203
4	SHAFT	17.0	0.0085
	TOTAL	87.8	0.4267


TWO BEARING DIMENSIONS

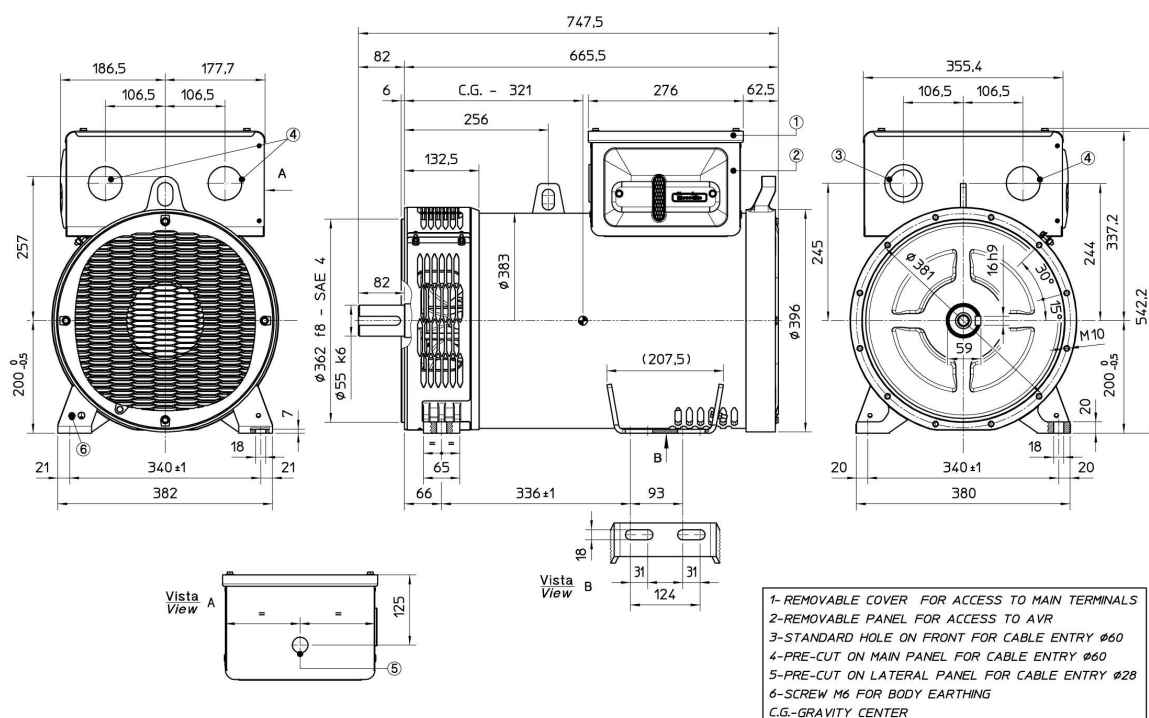

ECP32 4 C

ECP32 1L4 C

SINGLE BEARING MOMENTS OF INERTIA

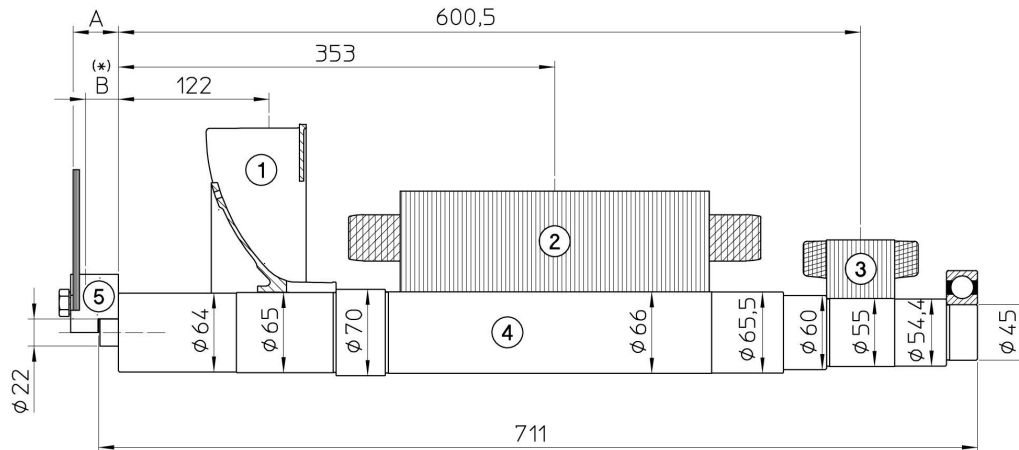


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	63.3	0.4225
3	EX. ROTOR	6.5	0.0203
4	SHAFT	16.7	0.0086
TOTAL		87.5	0.4628

5 SHAFTS COUPLING FLEX PLATE					
SAE N°	A	B	WEIGHT kg	J kgm ²	
6 1/2	5	2.2	1.7	0.0084	
7 1/2	5	2.2	2.1	0.0130	
8	36.6	25.9	4.0	0.0203	
10	28.6	21.6	4.5	0.0385	
11 1/2	15	11.5	4.5	0.0590	

(*) = FLYWHEEL GRAVITY CENTER

SINGLE BEARING DIMENSIONS

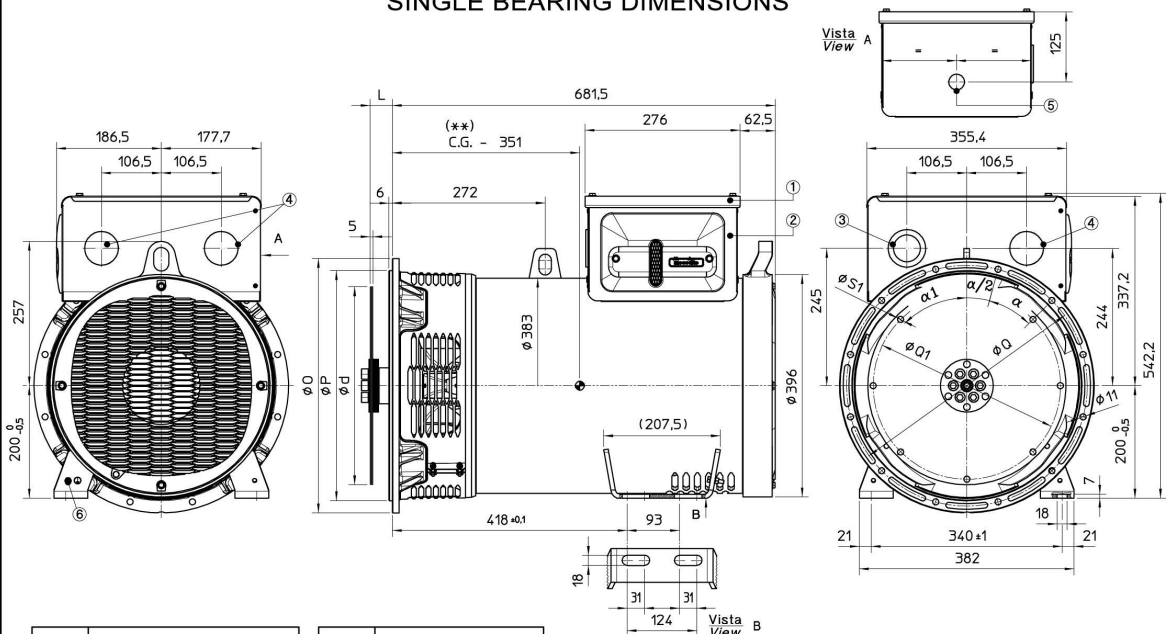

SAE N.	d	L	Q1	S1	α1
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	O	P	Q	α
5	356	314.3	333.4	45°
4	402	362	381	30°
3	453	409.6	428.6	30°
2	490	447.7	466.7	30°
1	553	511.2	530.2	30°


- 1-REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
- 2-REMOVABLE PANEL FOR ACCESS TO AVR
- 3-STANDARD HOLE ON FRONT FOR CABLE ENTRY Ø60
- 4-PRE-CUT ON MAIN PANEL FOR CABLE ENTRY Ø60
- 5-PRE-CUT ON LATERAL PANEL FOR CABLE ENTRY Ø28
- 6-SCREW M6 FOR BODY EARTHING

(**) = GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11 1/2

ECP32 4 C


ECP32 2L4 C

TWO BEARING MOMENTS OF INERTIA

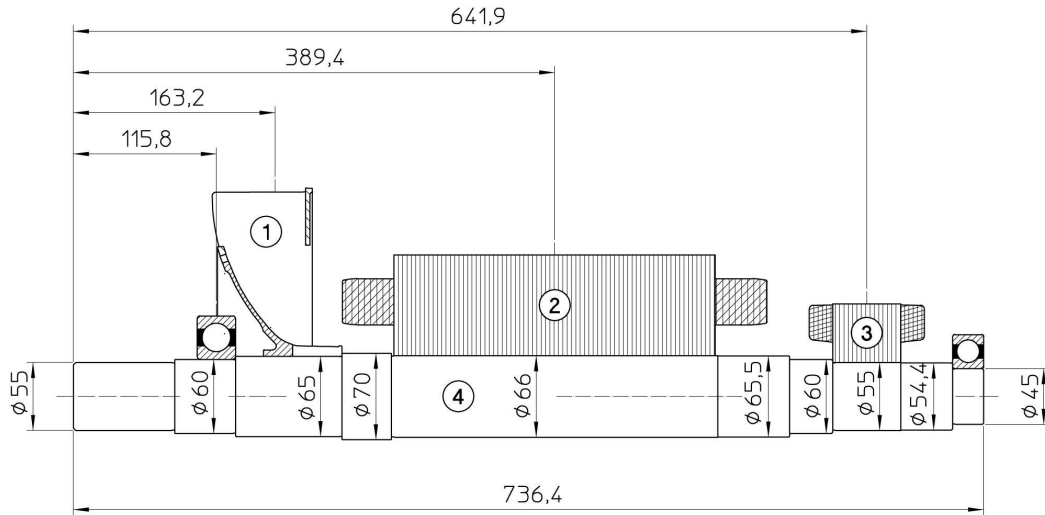

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	65.7	0.4387
3	EX. ROTOR	6.5	0.0203
4	SHAFT	17.0	0.0085
TOTAL		90.2	0.4789


TWO BEARING DIMENSIONS

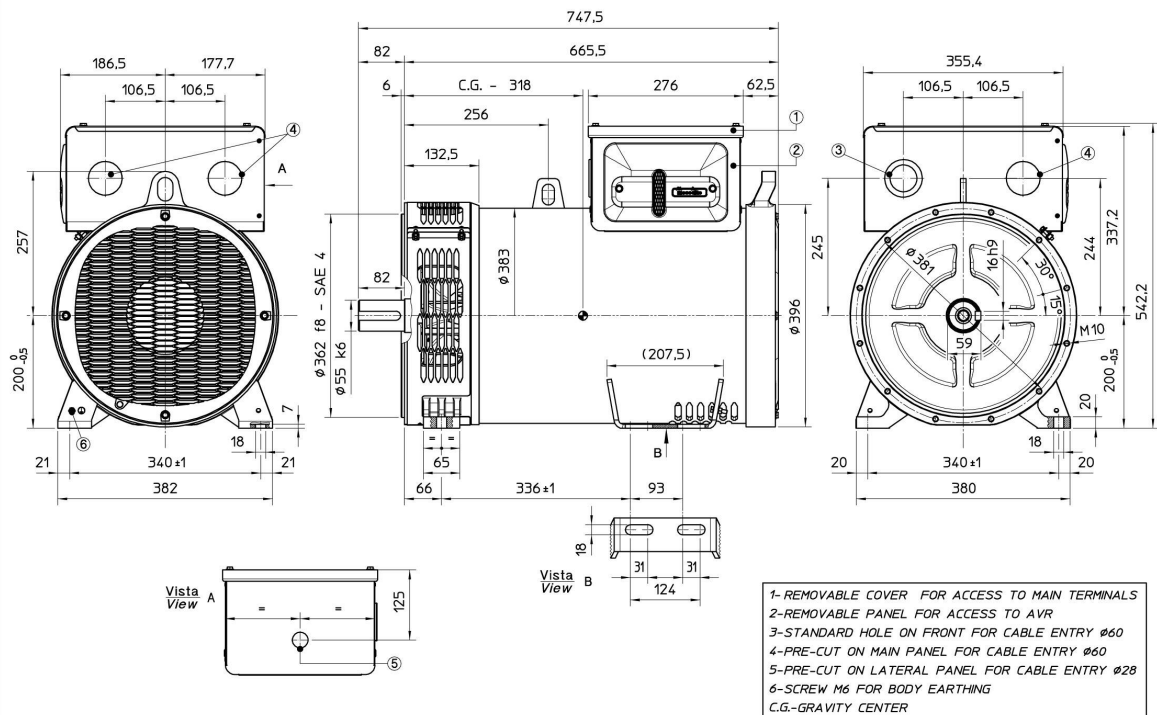

ECP32 4 C

ECP32 2L4 C

SINGLE BEARING MOMENTS OF INERTIA

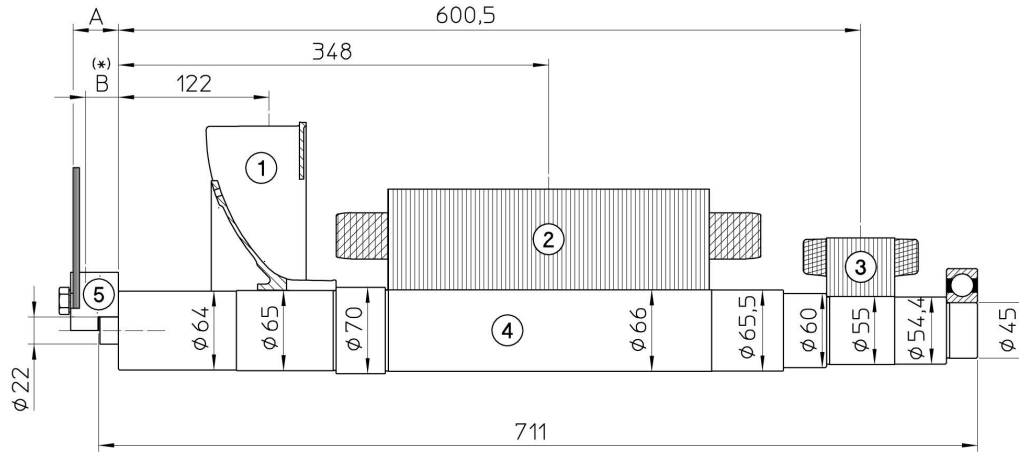


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	1.0	0.0114
2	MAIN ROTOR	65.7	0.4387
3	EX. ROTOR	6.5	0.0203
4	SHAFT	16.7	0.0086
TOTAL		89.9	0.4790

SAE N°	A	B	WEIGHT kg	J kgm ²
6 1/2	5	2.2	1.7	0.0084
7 1/2	5	2.2	2.1	0.0130
8	36.6	25.9	4.0	0.0203
10	28.6	21.6	4.5	0.0385
11 1/2	15	11.5	4.5	0.0590

(*) = FLYWHEEL GRAVITY CENTER

SINGLE BEARING DIMENSIONS

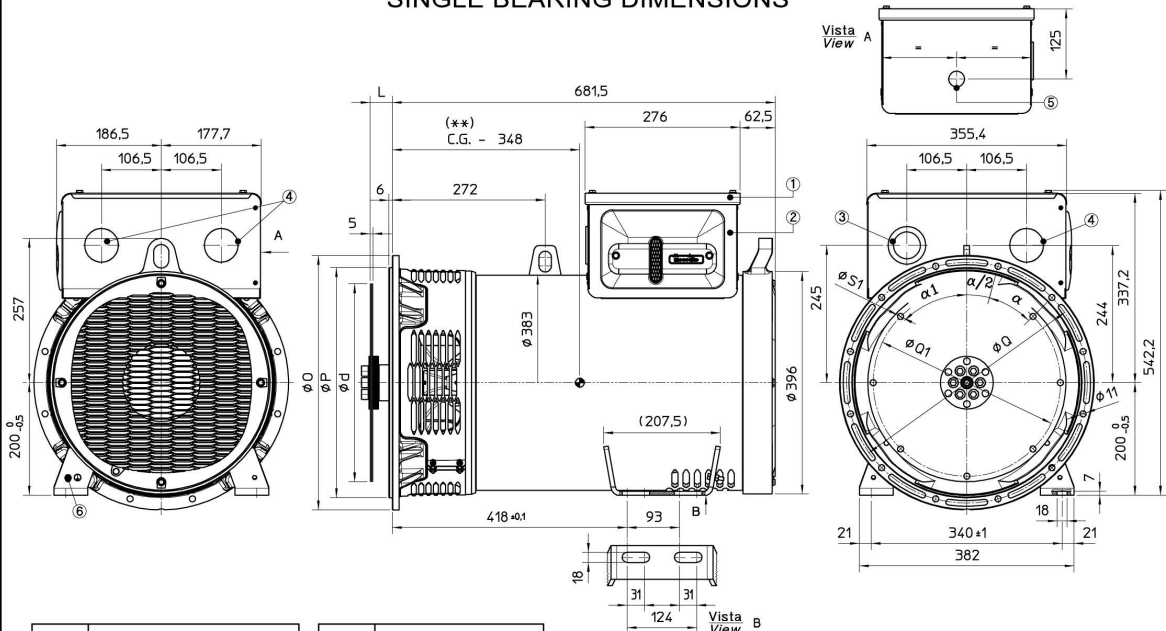

SAE N.	d	L	Q1	S1	α1
6 1/2	215.9	30.2	200	9	60°
7 1/2	241.3	30.2	222.25	9	45°
8	263.52	62	244.47	11	60°
10	314.32	53.8	295.27	11	45°
11 1/2	352.42	39.6	333.37	11	45°

SAE N.	O	P	Q	α
5	356	314.3	333.4	45°
4	402	362	381	30°
3	453	409.6	428.6	30°
2	490	447.7	466.7	30°
1	553	511.2	530.2	30°

1-REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
2-REMOVABLE PANEL FOR ACCESS TO AVR
3-STANDARD HOLE ON FRONT FOR CABLE ENTRY Ø60
4-PRE-CUT ON MAIN PANEL FOR CABLE ENTRY Ø60
5-PRE-CUT ON LATERAL PANEL FOR CABLE ENTRY Ø28
6-SCREW M6 FOR BODY EARTHING
(**)-GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11 1/2

Mecc Alte SpA (HQ)

Via Roma
20 - 36051 Creazzo
Vicenza - ITALY
T: +39 0444 396111
F: +39 0444 396166
E: info@meccalte.it
aftersales@meccalte.it

Mecc Alte Portable

Via Roma
20 - 36051 Creazzo
Vicenza - ITALY
T: +39 0444 396111
F: +39 0444 396166
E: info@meccalte.it
aftersales@meccalte.it

Mecc Alte Power Products srl

Via Melaro
2 - 36075 Montecchio
Maggiore (VI) - ITALY
T: +39 0444 1831295
F: +39 0444 1831306
E: info@meccalte.it
aftersales@meccalte.it

Zanardi Alternatori srl

Via Dei Laghi
48/B - 36077 Altavilla
Vicenza - ITALY
T: +39 0444 370799
F: +39 0444 370330
E: info@zanardialternatori.it

United Kingdom

Mecc Alte U.K. LTD
6 Lands' End Way
Oakham
Rutland LE15 6RF
T: +44 (0) 1572 771160
F: +44 (0) 1572 771161
E: info@meccalte.co.uk
aftersales@meccalte.co.uk

Spain

Mecc Alte España S.A.
C/ Rio Taibilla, 2
Polig. Ind. Los Valeros
03178 Benijofar (Alicante)
T: +34 (0) 96 6702152
F: +34 (0) 96 6700103
E: info@meccalte.es
aftersales@meccalte.es

China

Mecc Alte Alternator Haimen LTD
755 Nanhai East Rd
Jiangsu HEDZ 226100 PRC
T: +86 (0) 513 82325758
F: +86 (0) 513 82325768
E: info@meccalte.cn
aftersales@meccalte.cn

India

Mecc Alte India PVT LTD
Plot NO: 1, Sanaswadi
Talegaon
Dhamdhare Road Taluka:
Shirur, District:
Pune - 412208
Maharashtra, India
T: +91 2137 619600
F: +91 2137 619699
E: info@meccalte.in
aftersales@meccalte.in

U.S.A. and Canada

Mecc Alte Inc.
1229 Adams Drive
McHenry, IL, 60051
T: +1 815 344 0530
F: +1 815 344 0535
E: info@meccalte.us
aftersales@meccalte.us

Germany

Mecc Alte Generatoren GmbH
Ensener Weg 21
D-51149 Köln
T: +49 (0) 2203 503810
F: +49 (0) 2203 503796
E: info@meccalte.de
aftersales@meccalte.de

Australia

Mecc Alte Alternators PTY LTD
10 Duncan Road, PO Box 1046
Dry Creek, 5094, South
Australia
T: +61 (0) 8 8349 8422
F: +61 (0) 8 8349 8455
E: info@meccalte.com.au
aftersales@meccalte.com.au

France

Mecc Alte International S.A.
Z.E. La Gagnerie
16330 ST. Amant de Boixe
T: +33 (0) 545 397562
F: +33 (0) 545 398820
E: info@meccalte.fr
aftersales@meccalte.fr

Far East

Mecc Alte (F.E.) PTE LTD
19 Kian Teck Drive
Singapore 628836
T: +65 62 657122
F: +65 62 653991
E: info@meccalte.com.sg
aftersales@meccalte.com.sg

mecc alte**www.meccalte.com**