

CHARACTERISTICS

INDUSTRIAL RATINGS

ambient 40° C

Type	KVA - cos ϕ 0.8 - 3 Phase continuous							Efficiency		
50 Hz	CL. H ($\Delta T = 125^{\circ}\text{C}$)				CL. F ($\Delta T = 105^{\circ}\text{C}$)			η %	CL. H ($\Delta T = 125^{\circ}\text{C}$)	
Series Star Y	380	400	415	IP45 400 V	380	400	415	2/4	3/4	4/4
Parallel Star YY	190	200	208		190	200	208			
Series Delta Δ	220	230	240		220	230	240			
Parallel Delta $\Delta\Delta$	110	115	120		110	115	120			
ECP34-1.5VS/4	75	75	75	58	67	67	67	89	91	90,7
ECP34-1S/4	85	85	85	65	77	77	77	90	91,9	91,5
ECP34-2S/4	105	105	105	85	95	95	95	90,7	92,5	92,2
ECP34-1L/4	130	130	130	104	118	118	118	91,5	93,2	92,7
ECP34-2L/4	150	150	150	120	136	136	136	92	93,5	93,2
ECP34-3L/4	155	160	160	125	140	145	145	92,3	93,7	93,5

60 Hz	CL. H ($\Delta T = 125^{\circ}\text{C}$)				CL. F ($\Delta T = 105^{\circ}\text{C}$)			Efficiency		
Series Star Y	440	460	480	IP45 480 V	440	460	480	η %	CL. H ($\Delta T = 125^{\circ}\text{C}$)	
Parallel Star YY	220	230	240		220	230	240			
Series Delta Δ	254	265	277		254	265	277			
Parallel Delta $\Delta\Delta$	127	133	138		127	133	138			
ECP34-1.5VS/4	85	90	90	70	75	80	80	90,7	92,8	92,5
ECP34-1S/4	102	102	102	78	92	92	92	91,8	93,8	93,4
ECP34-2S/4	126	126	126	102	114	114	114	92,3	94,1	93,8
ECP34-1L/4	145	156	156	125	130	141	141	93,3	94,9	94,4
ECP34-2L/4	170	180	180	144	150	163	163	93,8	95,2	95
ECP34-3L/4	185	192	192	150	160	173	173	94,1	95,5	95,3

STANDBY RATINGS

Type	KVA Temp. Rise / Ambient $^{\circ}\text{C}$			KVA Temp. Rise / Ambient $^{\circ}\text{C}$		
	50 Hz			60 Hz		
	163° / 27°	150° / 40°	125° / 27°	163° / 27°	150° / 40°	125° / 27°
ECP34-1.5VS/4	83	79	79	100	95	95
ECP34-1S/4	95	90	90	114	108	108
ECP34-2S/4	116	110	110	139	132	132
ECP34-1L/4	143	138	138	171	165	165
ECP34-2L/4	164	158	158	196	189	189
ECP34-3L/4	175	169	169	210	202	202

Type	J (Kgm ²) B3-B14 FORM	Weight MD35 (Kg)	Air Volume		Noise dB(A)			
					50 Hz		60 Hz	
			50 Hz (m ³ /min)	60 Hz (m ³ /min)	1m	7m	1m	7m
ECP34-1.5VS/4	0,6238	310	19,3	23	79	65	83	69
ECP34-1S/4	0,7366	341						
ECP34-2S/4	0,9060	419						
ECP34-1L/4	0,9923	445						
ECP34-2L/4	1,1190	491						
ECP34-3L/4	1,1666	495						

ACCESSORIES

REGULATOR				PARALLEL DEVICE	THERMAL PROTECTION			HEATERS	MECHANICAL PROTECTION			
DSR	DER-1	SR7/2	UVR6		PTC	BIMET. DEVICE	PT100		IP21	IP23	IP45	IP55
☒	☐	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐


● = Standard
□ = Optional

Rating



OVERALL DIMENSIONS B3 - B14 FORM

dimensions in mm

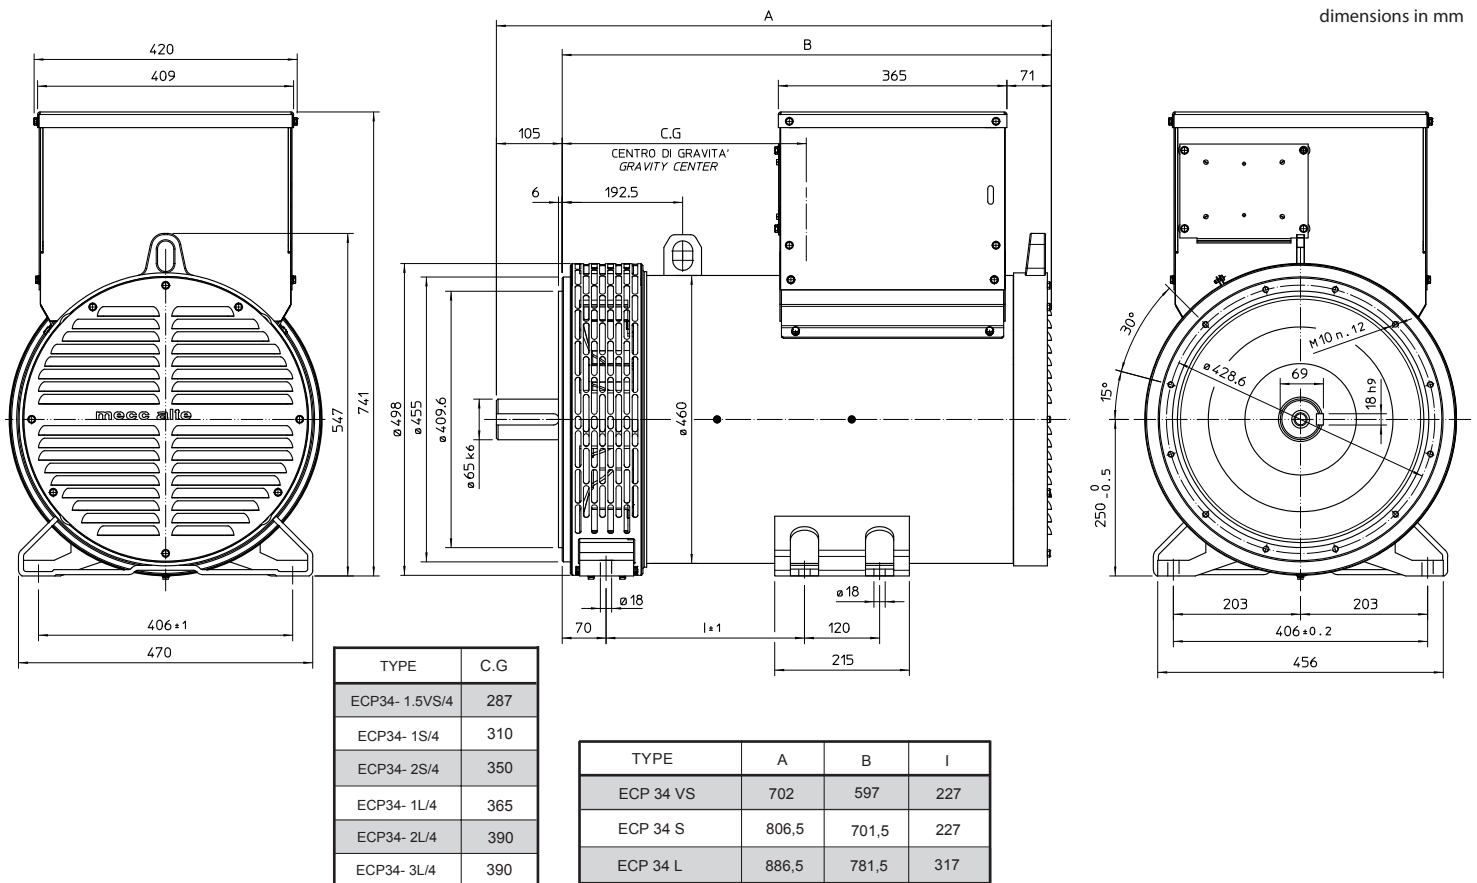

OVERALL DIMENSIONS MD35 FORM

dimensions in mm

