

Marine Engine- CW6200 Series

General Specifications

Bore & Stroke	200x270 mm
Displacement	50.9 L
Cylinder Number	6
Compression ratio	13.37
Fuel System	Mechanical Pump
Aspiration	TA
Emission Standard	IMO Tier II



Duty	Model	HP	kW	RPM
P1	XCW6200ZC-5	734	540	750
P1	XCW6200ZC-51	816	600	750
P1	CW6200ZC	816	600	1000
P1	CW6200ZC-5	734	540	900
P1	CW6200ZC-7	612	450	750

Duty	Model	HP	kW	RPM
P1	XCW6200ZC	949	698	1000
P1	XCW6200ZC-1	979	720	1000
P1	XCW6200ZC-4	881	648	900
P1	XCW6200ZC-10	1102	810	1000
P1	XCW6200ZC-2	1126	828	1000

Standard Equipments

Engine and block

Cast iron cylinder block
Steel forged crankshaft
Separate cast iron cylinder heads and wet liners
Aluminium alloy pistons or combined-type pistons with steel crown and aluminum skirt

Cooling system

Fresh / raw water heat exchanger with integrated thermostatic valves and expansion tank
Cast iron centrifugal fresh water pump, mechanically driven
Self-priming raw water pump, mechanically driven

Lubrication system

Filter with metal element, washable
Fresh water cooled lube oil cooler

Fuel system

One-piece injection pump or individual injection pump
Dual-skinned fuel pipe with alarm and leakage collector
Duplex fuel filters replaceable engine running

Intake air and exhaust system

Washable air filter
Turbocharger optimized for marine application
Insulated exhaust manifold and exhaust expansion joint

Electrical system

24V electric starter motor and battery charging alternator
Monitor on the engine

Certification

CCS and EIAPP

Optional Equipments


Air starter with storage bottles
Different harness length of remote monitor

Equipment and factory trial according to major Classification Societies rules

	P1 Duty	P2 Duty	P3 Duty	P4 Duty
Application	Unrestricted continuous	continuous	intermittent	high performance
Engine load variations	Very little or none	continuous	important	very important
Mean engine load factor	80 to 100%	30 to 80%	50%	30%
Annual working time	More than 5000 h	3000 to 5000 h	1000 to 3000h	less than 1000 h
Time at full load	unlimited	8 h each 12 h	2 h each 12 h	1 h each 12 h

Dimensions and Weight

Length	2928 mm
Width	1736 mm
Height	2412 mm
Dry Weight	6300-6500 kg

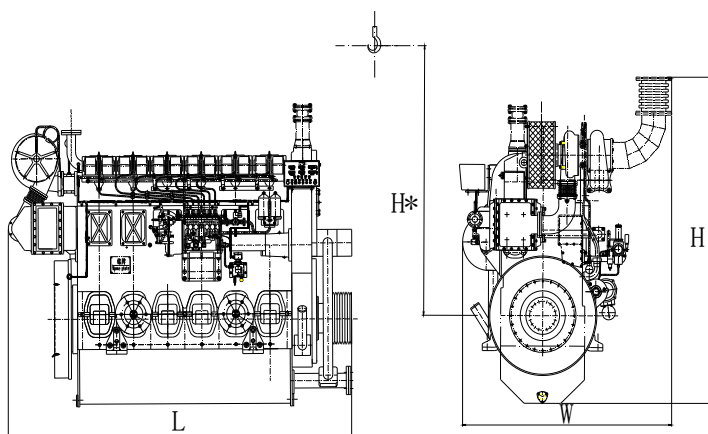

Power definition

Standard ISO 3046/1 -1995(F)

Reference conditions


Ambiant temperature	25 °C
Barometric pressure	100 kPa
Relative humidity	30%
Raw water temperature	25 °C

Fuel oil

Relative density	0,840 ± 0,005
Lower calorific power	42 700 kJ/kg
Consumption tolerances	± 5 %


Lube oil

Recommend grade	CD 15W/40
-----------------	-----------

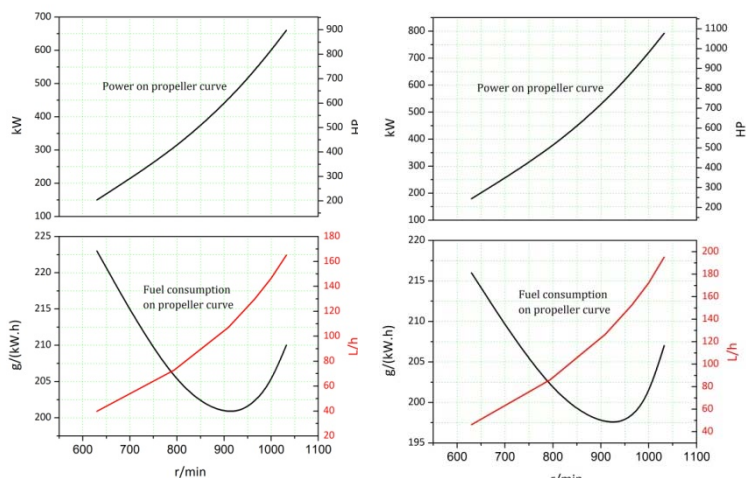

CW6200ZC

XCW6200ZC-1

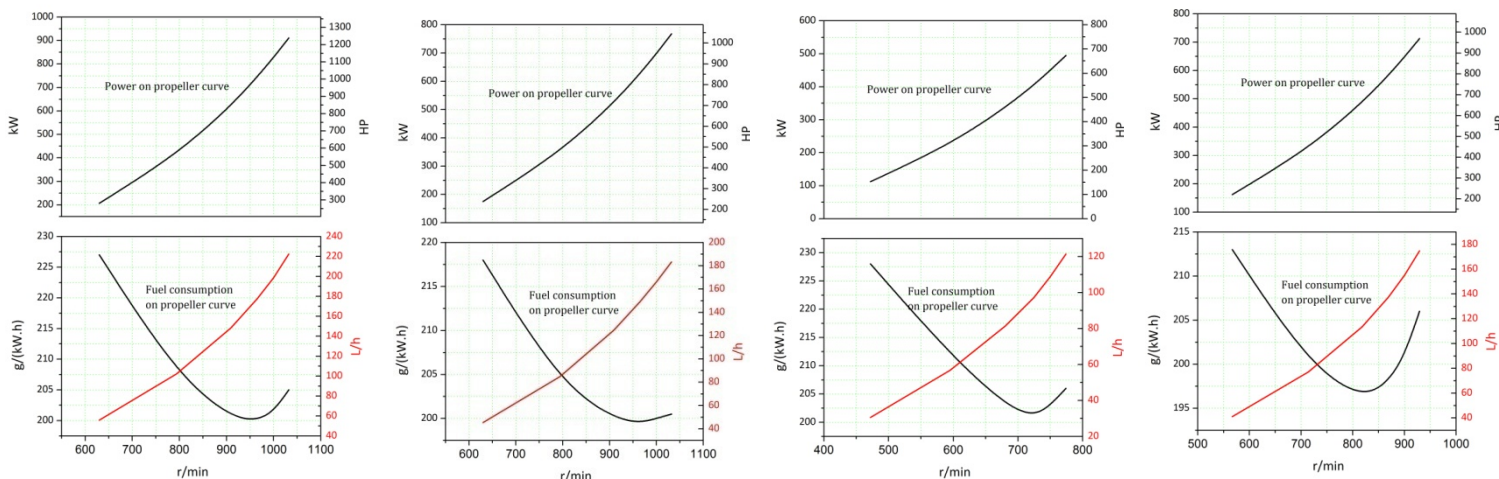

XCW6200ZC-2

XCW6200ZC


CW6200ZC-7

XCW6200ZC-4


Distributed By:

Manufacturer: Weichai Power Co., Ltd
Address: 197 A, Fushou East Street, High-Tech
Development Zone, Weifang, China
www.weichai.com



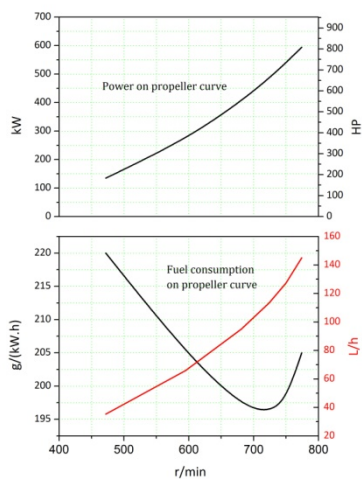

XCW6200ZC-5

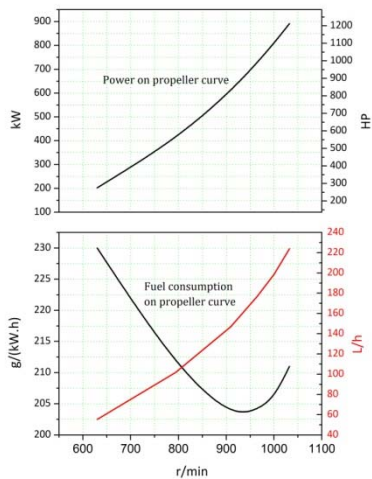

XCW6200ZC-10

Distributed By:

Manufacturer: Weichai Power Co., Ltd
Address: 197 A, Fushou East Street, High-Tech
Development Zone, Weifang, China
www.weichai.com

