


DIESEL GENERATOR SET

MTU 16V4000 DS2500

380V – 11 kV/50 Hz/Prime Power/NEA (ORDE) Optimized
MTU 16V4000G63/Water Charge Air Cooling

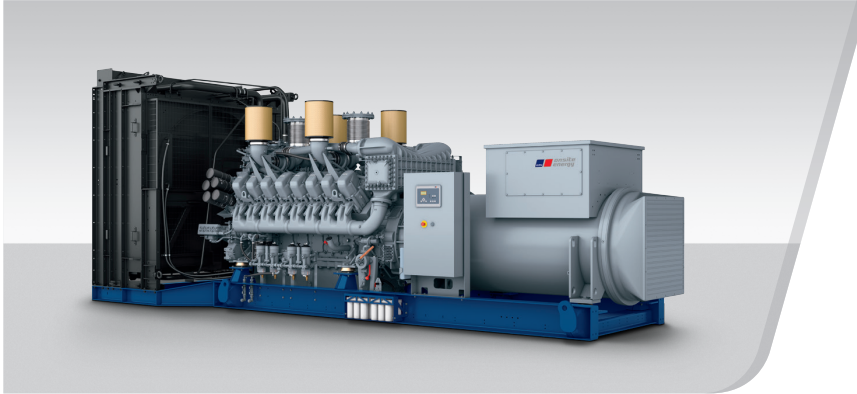

Optional equipment and finishing shown. Standard may vary.

PRODUCT HIGHLIGHTS

// Benefits

- Low fuel consumption
- Optimized system integration ability
- High reliability
- High availability of power
- Long maintenance intervals

// MTU Onsite Energy is a single-source supplier

// Support

- Global product support offered

// Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001 and ISO 2004:14001
- Generator set complies to ISO 8528
- Generator meets NEMA MG1, BS5000, ISO, DIN EN and IEC standards
- NFPA 110

// Power Rating

- System ratings: 2120 kVA - 2360 kVA
- Accepts rated load in one step per NFPA 110
- Generator set complies to G3 according to ISO 8528-5
- Generator set exceeds load steps according to ISO 8528-5

// Performance Assurance Certification (PAC)

- Engine-generator set tested to ISO 8528-5 for transient response
- 75% load factor
- Verified product design, quality and performance integrity
- All engine systems are prototype and factory tested

// Complete range of accessories available

- Control panel
- Power panel
- Circuit breaker/power distribution
- Fuel system
- Fuel connections with shut-off valve mounted to base frame
- Starting/charging system
- Exhaust system
- Mechanical and electrical driven radiators
- Medium and oversized voltage alternators

// Emissions

- NEA (ORDE) optimized

// Certifications

- CE certification option
- Unit certificate acc. to BDEW (German Grid-Code)

APPLICATION DATA^①

// Engine

Manufacturer	MTU
Model	16V4000G63
Type	4-cycle
Arrangement	16V
Displacement: l	76.3
Bore: mm	170
Stroke: mm	210
Compression ratio	16.4
Rated speed: rpm	1500
Engine governor	ADEC
Max power: kWm	1965
Air cleaner	Dry

// Fuel System

Maximum fuel lift: m	5
Total fuel flow: l/min	20

// Fuel Consumption^②

	l/hr	g/kwh
At 100% of power rating:	471.1	199
At 75% of power rating:	358.7	202
At 50% of power rating:	247.4	209

// Liquid Capacity (Lubrication)

Total oil system capacity: l	300
Engine jacket water capacity: l	175
Intercooler coolant capacity: l	50

// Combustion Air Requirements

Combustion air volume: m ³ /s	2.5
Max. air intake restriction: mbar	50

// Cooling/Radiator System

Coolant flow rate (HT circuit): m ³ /h	68.5
Coolant flow rate (LT circuit): m ³ /h	30
Heat rejection to coolant: kW	660
Heat radiated to charge air cooling: kW	430
Heat radiated to ambient: kW	90
Fan power for electr. radiator (40°C): kW	70

// Exhaust System

Exhaust gas temp. (after turbocharger): °C	480
Exhaust gas volume: m ³ /s	6.6
Maximum allowable back pressure: mbar	85
Minimum allowable back pressure: mbar	30

① All data refers only to the engine and is based on ISO standard conditions (25°C and 100m above sea level).

② Values referenced are in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml.
 All fuel consumption values refer to rated engine power.

STANDARD AND OPTIONAL FEATURES

// System Ratings (kW/kVA)

Generator model	Voltage	NEA (ORDE) optimized 40°C/100m					
		without radiator			with mechanical radiator		
		kWel	kVA*	AMPS	kWel	kVA*	AMPS
Leroy Somer LSA52.3 L12	380 V	1888	2360	3586	1816	2270	3449
(Low voltage	400 V	1888	2360	3406	1816	2270	3276
Leroy Somer standard)	415 V	1888	2360	3283	1816	2270	3158
Leroy Somer LSA53.2 M7	380 V	1888	2360	3586	1816	2270	3449
(Low voltage	400 V	1888	2360	3406	1816	2270	3276
Leroy Somer oversized)	415 V	1888	2360	3283	1816	2270	3158
Marathon 744RSL7092	380 V	1832	2290	3479	1752	2190	3327
(Low voltage Marathon)	400 V	1824	2280	3291	1784	2230	3219
	415 V	1696	2120	2949	1696	2120	2949
Marathon 1020FDL7093	380 V	1832	2290	3479	1752	2190	3327
(Low voltage	400 V	1824	2280	3291	1784	2230	3219
Marathon oversized)	415 V	1696	2120	2949	1696	2120	2949
Marathon 1020FDH7099	11 kV	1880	2350	123	1808	2260	119
(Medium volt. marathon)							
Leroy Somer LSA53.2 XL11	11 kV	1880	2350	123	1816	2270	119
(Medium volt. Leroy Somer)							

* cos phi = 0,8

// Engine

- 4-Cycle
- Standard single stage air filter
- Oil drain extension & shut-off valve

- Closed crankcase ventilation
- Governor-electronic isochronous
- Common rail fuel injection

- NEA (ORDE) optimized engine

// Generator

- 4 pole three-phase synchronous generator
- Brushless, self-excited, self-regulating, self-ventilated
- Digital voltage regulator
- Anti condensation heater
- Stator winding Y-connected, accessible neutral (brought out)
- Protection IP23
- Insulation class H, utilization acc. to H
- Radio suppression EN55011, group 1, cl. B

- Short circuit capability 3xIn for 10sec
- Winding and bearing RTDs (without monitoring)
- Excitation by AREP
- Mounting of CT's: 2 core CT's
- Winding pitch: 2/3 winding
- Voltage setpoint adjustment ± 10%
- Meets NEMA MG-1, BS 5000, IEC 60034-1, VDE 0530, DIN EN 12601, AS1359 and ISO 8528 requirements

- Leroy Somer low voltage generator
- Marathon low voltage generator
- Oversized generator
- Medium voltage generator

■ Represents standard features

□ Represents optional features

STANDARD AND OPTIONAL FEATURES, CONTINUATION

// Cooling System

- | | |
|--|---|
| ☒ Jacket water pump | ☐ Mechanical radiator |
| ☒ Thermostat(s) | ☐ Electrical driven front-end cooler |
| ☒ Water charge air cooling | ☐ Jacket water heater |

// Control Panel

- | | | |
|---|---|---|
| ☒ Pre-wired control cabinet for easy application of customized controller (V1+) | ☐ Basler controller | ☐ Different expansion modules |
| ☐ Island operation (V2) | ☐ Deif controller | ☐ Remote annunciator |
| ☐ Automatic mains failure operation with ATS (V3a) | ☒ Complete system metering | ☐ Daytank control |
| ☐ Automatic mains failure operation incl. control of generator and mains breaker (V3b) | ☒ Digital metering | ☐ Generator winding temperature monitoring |
| ☐ Island parallel operation of multiple gensets (V4) | ☒ Engine parameters | ☐ Generator bearing temperature monitoring |
| ☐ Automatic mains failure operation with short (< 10s) mains parallel overlap synchronization (V5) | ☒ Generator protection functions | ☐ Modbus TCP-IP |
| ☐ Mains parallel operation of a single genset (V6) | ☒ Engine protection | |
| ☐ Mains parallel operation of multiple gensets (V7) | ☒ SAE J1939 engine ECU communications | |
| | ☒ Parametrization software | |
| | ☒ Multilingual capability | |
| | ☒ Multiple programmable contact inputs | |
| | ☒ Multiple contact outputs | |
| | ☒ Event recording | |
| | ☒ IP 54 front panel rating with integrated gasket | |

// Power Panel

- | | | |
|--|---|---|
| ☐ Available in 600x600 and 600x1000 | ☐ Supply for anti condensation heating | ☐ Supply electrical driven radiator from 45kW – 75kW (PP 600x1000) |
| ☐ Phase monitoring relay 230V/400V | ☐ Plug socket cabinet for 230V compatible Euro/USA | |
| ☐ Supply for battery charger | | |
| ☐ Supply for jacket water heater | | |

// Circuit Breaker/Power Distribution

- | | | |
|---|--|---|
| ☐ 3-pole circuit breaker | ☐ Manual-actuated circuit breaker | ☐ Stand-alone solution in separate cabinet |
| ☐ 4-pole circuit breaker | ☐ Electrical-actuated circuit breaker | |

STANDARD AND OPTIONAL FEATURES, CONTINUATION

// Fuel System

- | | | |
|---|--|--|
| ☒ Flexible fuel connectors mounted to base frame
☐ Fuel filter with water separator
☐ Fuel filter with water separator heavy-duty | ☐ Switchable fuel filter with water separator
☐ Switchable fuel filter with water separator heavy-duty
☐ Seperate fuel cooler | ☐ Fuel cooler integrated into cooling equipment |
|---|--|--|

// Starting/Charging System

- | | | |
|---|---|--|
| ☒ 24V starter | ☐ Starter batteries, cables, rack, disconnect switch | ☐ Battery charger |
|---|---|--|


// Mounting System

- | | | |
|---|---|---|
| ☒ Welded base frame | ☒ Resilient engine and generator mounting | ☒ Modular base frame design |
|---|---|---|

// Exhaust System

- | | | |
|--|--|--|
| ☐ Exhaust bellows with connection flange
☐ Exhaust silencer with 10 dB(A) sound attenuation | ☐ Exhaust silencer with 30 dB(A) sound attenuation
☐ Exhaust silencer with 40 dB(A) sound attenuation | ☐ Y-connection-pipe |
|--|--|--|

WEIGHTS AND DIMENSIONS

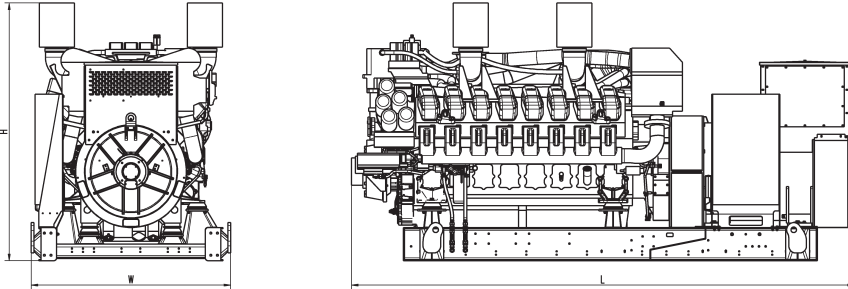

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (L x W x H)	Weight (dry/less tank)
Open Power Unit (OPU)	4766 x 1810 x 2330 mm	13395 kg

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

SOUND DATA

// Consult your local MTU Onsite Energy distributor for sound data.

EMISSIONS DATA

// Consult your local MTU Onsite Energy distributor for emissions data.

RATING DEFINITIONS AND CONDITIONS

// Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514 and AS 2789. Average load factor: $\leq 75\%$.

// Derating factor:

Altitude: Consult your local MTU Onsite Energy Power Generation distributor for altitude derating.

Temperature: Consult your local MTU Onsite Energy Power Generation distributor for temperature derating.

Rated power is available up to 40°C and 100m above sea level.

Materials and specifications subject to change without notice.